# Tamkeen Modern Pipes Company

# 01 ✧ Company Profile

# For complete plastic producers of piping systems

**Dear Sir,**

We Tamkeen Modern Pipes Company is one of the leading water pipe systems manufacturers in Saudi Arabia. Through constant growth and product diversification, the company continues to be the pioneer in thermoplastic pipe manufacturer in the Middle East region and contribute the same to customers by providing quality UPVC& CPVC Pipes product, and improve ourselves as the best according to the global changes. The company aims to be responsive and reliable producers of plastics pipe products, Like, UPVC& CPVC Pipes (by extrusion process) with a number of highly qualified, dedicated and well experienced staffs. Tamkeen quality assurance department can emphasize conformance of the manufactured pipes to many international manufacturing standards. But not restricted to SASO ISO 1452-1/2, DIN, and ASTM, BS, ISO.

## Tamkeen,Equipment's and Facilities:

Tamkeen plant activities are supported by fully equipped most modern sophisticated and advanced pipe extrusion machines and the pipe testing laboratory and raw materials are procured from internationally recognized manufacturers and suppliers.

The equipment's are the number one in the industries. All equipment's (PVC pipe machines (Extruder) & PVC pipe testing machines (Laboratory) imported from Europe.

## Tamkeen,uPVCPipes/Products applications:

For Supply complete plastic piping system: Water supply, Waste, Drainage, Ventilation, Sewer and Irrigation, Electric, Housing, Telecom, Constructions and Industries. (Civil Construction / Sewerage & Water Treatment Plants /Water Irrigation & Electricity, Telephone) etc.

## Tamkeen, Production Program is as under:

- Upvc Pipes according to SASO ISO 1452-1/2 ranging from 20 mm to 630 mm Dias in different nominal pressure PN(6, 8, 10, 12.5, 16&20).
- Upvc Pipes according to ASTM D 1785 ranging from ½" to 8" (Sch-40)
- Upvc Pipes according to ASTM D 1785 ranging from ½" to 6" (Sch-80)
- Other specifications of Upvc pipes please, refer to our catalogue enclosed.

## Tamkeen,
## Quality Assurance (QA) and Quality Control (QC):

The QA/QC Department is well equipped with Qualified Inspectors, The company's Quality policy has to provide the best products of high quality in affordable prices at the agreed time and strive for enhancing customer satisfaction, The QA/QC Inspectors carry out inspection tests in accordance with National & International standards with the established procedures & forms to ensure conformity of the products up to the specifications with regards to thickness, dimensional and some of the important tests conducted.

# Tamkeen,
# Upvc&Cpvc Pipes tests conducted as follows:

- Visual Appearances,
- Line Inspection for General & Geometrical Characteristics,
- Pipe Weight,
- Stress Test ,
- Impact Test,
- Opacity Test,
- Longitudinal Reversions Test,
- Resistance to Dichloro-Methane Test,
- Toxicity Test (Lead and Tin Extraction),
- Water Absorption Test,
- Resistance to Sulphuric acid.

## Your enquiry is highly solicited, please call us at:

**Location of our factory:**
Jeddah – 2nd Industrial Area.
Phone Number: 012-6110639,
P.O. Box 15442,Jeddah 215442 KSA.
Email: info@tamkeen.com.sa website: www.tamkeen.com.sa.

# 02 ✧ Govt. Certificates

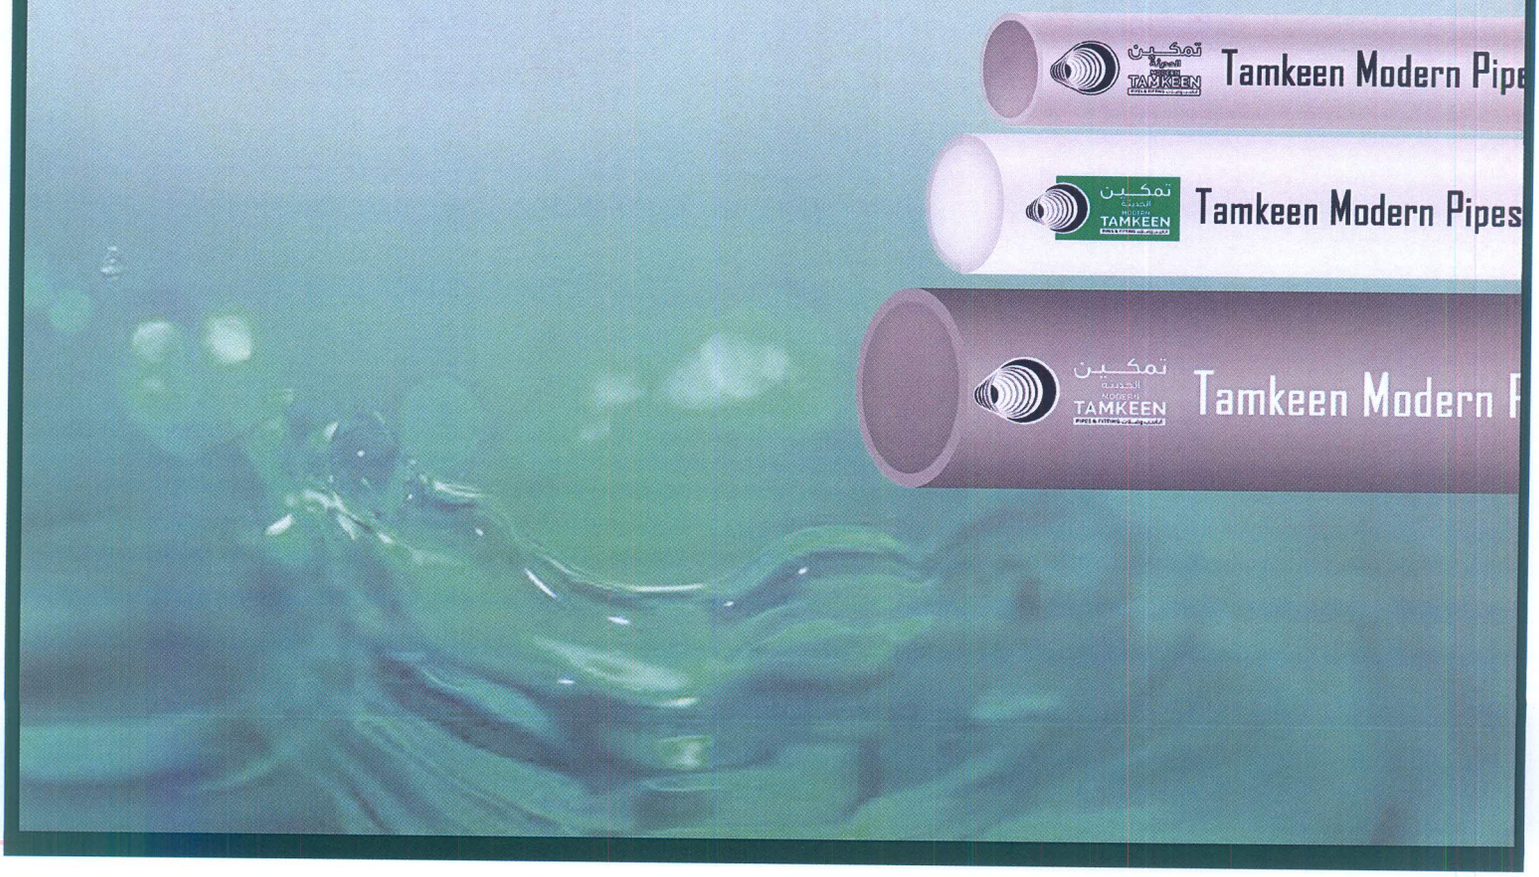

وزارة التجارة
Ministry of Commerce

VISION رؤية 2030
KINGDOM OF SAUDI ARABIA

شركة تمكين الحديثة للأنابيب

السجل التجاري: 4030206443

SaudiMci
www.mci.gov.sa

## رمزك التجاري QR Code

من خلاله يمكنك التحقق المباشر من معلومات:

- السجل التجاري
- رخصة البلدية
- شهادة السعودة
- برنامج نطاقات
- شهادة الزكاة
- الغرفة التجارية

رؤية VISION 2030
المملكة العربية السعودية
KINGDOM OF SAUDI ARABIA

وزارة التجارة
Ministry of Commerce

الرقم: ٤٠٣٠٢٠٦٤٤٣
التاريخ: ١٤٣١/١٢/٢٢ هـ

## شهادة تسجيل الشركة

الرقم الموحد للمنشأة: ٧٠١٤٢١٦٦١٣

الاسم التجاري للشركة: **شركة تمكين الحديثة للأنابيب**

نوعها: **ذات مسئوليةمحدودة** جنسيتها: **سعودى**

مدة الشركة: **٢٠ سنة** تبدا من: **١٤٤٣/٠١/٢٦ هـ** وتنتهي في: **١٤٦٣/٠٩/٠٧ هـ**

مركزها الرئيسي: **جده حي الشاطئ شارع جويريه بنت الحارث**

ص ب: ٢٧٠١ الرمز البريدي: ٢٣٥١٣ هاتف: ٦٠٩٤٠١٧

النشاط: **للاطلاع على بيانات الأنشطة الرجاء مسح الرمز التجاري**

رأس المال: **١٠٠٠٠٠٠ ريال سعودي**

المديرون:

| | |
|---|---|
| ١ **فيصل ناصر سالمين العامري** | ٢ |
| ٣ | ٤ |
| ٥ | ٦ |
| ٧ | ٨ |
| ٩ | ١٠ |
| ١١ | ١٢ |

سلطات المدير/المديرون: **حسب ما نص عليه عقد الشركة**

يشهد مكتب السجل التجاري بمدينة: **جدة** بأنه تم تسجيل فرع الشركة المذكورة أعلاه بمدينة: **جدة**

وتنتهي صلاحية الشهادة في: **١٤٤٨/٠١/٢٦ هـ** بموجب الإيصال رقم: **١٣١١١٧٤٣** وتاريخ: **١٤٣٩/٠٥/٢٧ هـ**

مدير السجل التجاري للشركات: **عبد المحسن بن ابراهيم الحماد**

التوقيع:

To Verify the information of this certificate visit http://v.mci.gov.sa يمكنك التحقق من صحة هذة الشهادة بالدخول على

وزارة التجارة
Ministry of Commerce

VISION رؤية 2030

**السادة/** شركة تمكين الحديثة للأنابيب

نهنئكم بدخول عالم الأعمال التجارية وإصدار سجلكم التجاري، ونتطلع بأن يسهم هذا السجل في تحقيق تطلعاتكم، وأن يكتب الله لكم التوفيق والنجاح في عملكم التجاري وأن تكون شريكاً في تعزيز اقتصاد المملكة العربية السعودية.

يسرنا إبلاغكم بأن رقم منشأتكم الموحد هو ٧٠١٤٢١٦٦١٣ وقد تم ربطه بجميع الخدمات الحكومية التي ستحتاجها مستقبلاً ،وهي على النحو التالي:

| | | الرقم: |
|---|---|---|
| وزارة التجارة Ministry of Commerce | رقم سجلكم التجاري للمنشاة. | ٤٠٣٠٢٠٦٤٤٣ |
| | رقم منشأتكم لدى وزارة الموارد البشرية والتنمية الاجتماعية. | ١٨٩٠٦٦ |
| البريد السعودي Saudi Post | تم تسجيل منشاتكم مجاناً لمدة سنة في خدمة (واصل) التجاري . | ٩٠٧٠٤٠١٢٦ |
| | رقم منشأتكم لدى الهيئة العامة للزكاة والدخل. | ٣٠٠١٣٣٩٧٨٤ |
| | رقم منشأتكم لدى المؤسسة العامة للتأمينات الاجتماعية. | ٥٠٧٩٩٠٦٧٣ |
| | رقم منشأتكم لدى الغرفة التجارية. | ١٧١١٦٣ |
| بلدي balady | رقم رخصة "بلدية" فورية (في حال اختياركم). | لا يوجد |

**ويمكنك فتح حساب بنكي دون الحاجة إلى وجود أي أختام لمنشأتك.**

كما جمعنا لك كافة الأنظمة واللوائح بلغة بسيطة في **دليل التاجر** لتمارس عملك التجاري بسهولة mci.gov.sa/trader/guide

المملكة العربية السعودية
Kingdom of Saudi Arabia

الهيئة السعودية للملكية الفكرية
Saudi Authority for Intellectual Property

# شهادة إيداع علامة تجارية

السادة: ناصر سالمين عانوز العامري المحترمين

السلام عليكم ورحمة الله وبركاته

بالإشارة إلى طلبكم الوارد لدينا رقم: 97417 بتاريخ: 1442/11/21

والمنصوص فيه طلب إيداع علامة تجارية

- رقم طلب التسجيل: 298683
- فئة العلامة: 17
- اسم العلامة بالعربي: تمكين الحديثة أنابيب وصلات
- اسم العلامة باللاتيني: TAMKEEN MODERN PIPES & FITTING
- مالك العلامة: مصنع مصاغ للصناعات البلاستيكيه
- وصف العلامة: مستطيل باللون الاخضر وبداخلها عبارة تمكين الحديثة وانابيب وصلات بحروف عربية و مودرن تمكين بايبز آند فيتينج بحروف لاتينيه ودائره على شكل انبوب بلاستيك باللون الاسود والابيض.
- العنوان الوطني: جدة - الصناعية الثانية بجدة - الصناعية الثانية ، الرمز البريدي: 22427 ، الرقم الإضافي: 6972 ، رقم المبنى: 3453 ، رقم الوحدة: 13

## نفيدكم بأنه تم قبول العلامة التجارية

وتشهد إدارة العلامات التجارية بالهيئة السعودية للملكية الفكرية أن العلامة التجارية الموضح بياناتها أعلاه تم قبولها ومازالت تحت الاجراءات.

وتعد هذه الوثيقة شهادة إيداع لتقديمها للجهات ذات العلاقة، صالحة لغاية 1443/01/20

هذه الوثيقة صادرة من النظام الآلي ولا تحتاج إلى توقيع

- الهيئة السعودية للملكية الفكرية -

Olaya St, Riyadh 13321 KSA
Unified number: 920021421
@SAIPKSA
WWW.SAIP.GOV.SA

103210002111826

رقم الشهادة : ١٠٣٢١٠٠٠٢١١١٨٢٦
التاريخ : ١٤٤٣/٠٥/١٦ هـ
الرقم المميز: ٣١١١٢٧٣٨٨٩

الهيئة العامة للزكاة والدخل
General Authority of Zakat & Tax

المملكة العربية السعودية
الهيئة العامة للزكاة والدخل
General Authority of Zakat & Tax

# شهادة
## CERTIFICATE
## تسجيل

تشهد الهيئة العامة للزكاة والدخل بأن المكلف / شركة تمكين الحديثة للأنابيب

شركة رقم ٧٠١٤٢١٦٦١٣ وسجل تجاري / رخصة / عقد رقم ٤٠٣٠٢٠٦٤٤٣

مسجل لديها بالرقم المميز ٣١١١٢٧٣٨٨٩ بتاريخ ١٤٤٣/٠٥/٠٥هـ

وقد منح هذه الشهاده لتمكينه من إنهاء جميع معاملاته ماعدا صرف مستحقاته النهائية

عن العقود .

يسري مفعول هذه الشهادة حتى تاريخ ١٤٤٤/٠٩/٢٩ هـ الموافق ٢٠٢٣/٠٤/٢٠ م .

(التاسع و العشرون من رمضان ألف و أربعمائة و أربعة و أربعون هجري)

الهيئة العامة للزكاة والدخل
GENERAL AUTHORITY OF ZAKAT & TAX
الشهادات

الختم الرسمي

هذة الوثيقة مستخرجة من النظام الآلي ولا تحتاج إلى توقيع

لإعتماد هذه الشهادة الرجاء التحقق من موقع الهيئة www.gazt.gov.sa

100211046942234

تاريخ الإصدار: 2021/12/26
الرقم المميز: 3111273889

الهيئة العامة للزكاة والدخل
General Authority of Zakat & Tax

ضريبة القيمة المضافة
VAT

# شهادة تسجيل في ضريبة القيمة المضافة
# VAT Registration Certificate

تشهد الهيئة العامة للزكاة والدخل بأن المكلف أدناه مسجل في ضريبة القيمة المضافة بتاريخ 2021/12/26

Hereby, The General Authority of Zakat & Tax (GAZT) certifies that the taxpayer below is VAT registered on 26/12/2021

| | | |
|---|---|---|
| **Taxpayer Name:** | شركة تمكين الحديثة للأنابيب | **اسم المكلف:** |
| **VAT Registration Number:** | 311127388900003 | **رقم التسجيل الضريبي:** |
| **Effective Registration Date:** | 2021/12/01 | **تاريخ نفاذ التسجيل:** |
| **Taxpayer Address:** | جدة،حي الشاطئ،المطلب بن عبدالله ،23513 | **عنوان المكلف:** |

كمكلف مسجل في ضريبة القيمة المضافة، لا يجوز لك تحصيل ضريبة القيمة المضافة من عملائك قبل تاريخ نفاذ التسجيل بالضريبة. في حال تبين غير ذلك، ستقوم الهيئة العامة للزكاة والدخل بتنفيذ الغرامات المستحقة

**هذه الوثيقة مرسلة من النظام الآلي ولا تحتاج إلى توقيع**

– الهيئة العامة للزكاة والدخل –

100211046942234

تاريخ الإصدار: 2021/12/26

الرقم المميز: 3111273889

الهيئة العامة للزكاة والدخل

General Authority of Zakat & Tax

ضريبة القيمة المضافة

VAT

| | | |
|---|---|---|
| Taxpayer Name: | شركة تمكين الحديثة للأنابيب | اسم المكلف: |
| CR / License / Contract No.: | 4030206443 | رقم السجل/الرخصة/العقد: |
| Tax Period: | Quarterly-ربع سنوي | الفترة الضريبية: |
| First Filing due date: | 2022/01/31 | تاريخ استحقاق أول إقرار ضريبي: |

كمكلف مسجل في ضريبة القيمة المضافة، لا يجوز لك تحصيل ضريبة القيمة المضافة من عملائك قبل تاريخ نفاذ التسجيل بالضريبة. في حال تبين غير ذلك، ستقوم الهيئة العامة للزكاة والدخل بتنفيذ الغرامات المستحقة

**هذه الوثيقة مرسلة من النظام الآلي ولا تحتاج إلى توقيع**

**- الهيئة العامة للزكاة والدخل -**

# عقد إيجار أرض صناعية

MODON مدن
الهيئة السعودية للمدن الصناعية ومناطق التقنية
Saudi Authority for Industrial Cities and Technology Zones

بيانات العقد

رقم العقد : 813716 نوع العقد : صناعي المدينة : جدة الثانية

الطرف الأول : الهيئة السعودية للمدن الصناعية ومناطق التقنية يشار لها في هذا العقد بـ(مدن)، ويمثلها /

الطرف الثاني : شركة تمكين الحديثة للأنابيب . يشار له في هذا العقد بـ المستأجر

نوع الصناعة : صنع منتجات المطاط والبلاستك تصنيف النشاط : صنع منتجات المطاط والبلاستك

رقم القطعة : 0150G00047 مساحة القطعة : 31482 م2

الايجار السنوي : 94446 ريال سعودي

تاريخ بداية العقد : 1443/3/29 هـ تاريخ نهاية العقد : 1451/3/28 هـ

الترخيص الصناعي رقم :351363 سجل تجاري رقم : 4030206443

وتاريخ : 1443/3/20 هـ وتاريخ : 1431/12/22 هـ

المصدر : جدة

العنوان المدينة : جدة الثانية ص.ب : 2701 الرمز البريدي : 23513

هاتف: جوال : 0502445561 بريد الكتروني: yahya.hotan30@gmail.com

فاكس:

يمثل المستأجر : امين صالح محمد جعفر العامري

رقم الهوية : 1108240951 تاريخها:

الصفة : مفوض رقم خطاب التفويض : 2255470 تاريخ الخطاب : 1443/4/23

المستأجر

شركة تمكين الحديثة للأنابيب الختم: شركة تمكين الحديثة للأنابيب س.ت: ٤٠٣٠٢٠٦٤٤٣ C.R. 4030206443 Tamkeen Modern Pipes Company

التوقيع:

مدن

المهندس / اسامة بن سعيد الغامدي التوقيع

مدير قسم التراخيص والرقابة الصناعية الختم MODON مدن المدينة الصناعية الثانية بجدة

العنوان :الرياض ص.ب :84214 الرمز البريدي :11671 الهاتف :8002499944 الفاكس :8749192

- بنود العقد خلف هذه الصفحة
- يجب تسليم المخططات وإعتمادها من مدن خلال مدة لاتتجاوز (6) ستة اشهر من تاريخ بداية هذا العقد، والبدء في تنفيذ الانشـــاءات خلال مـدة لا تتجاوز (9) تسعة أشهر من تاريخ بداية هذا العقد، وإلا اعتبر هذا العقد لاغي تلقائياً
- تطبق المادة (12) الثانية عشرة من هذا العقد مباشرة إذا كان المستأجر قد استنفذ المدد المعطاة له بناء على عقد سابق لبدء التنفيذ وإكمال الأعمال والبدء في الانتاج

رقم تصنيف العقد :ص-2-1432

MODON مدن
الهيئة السعودية للمدن الصناعية ومناطق التقنية
Saudi Authority for Industrial Cities and Technology Zones

# رخصة تشغيل

تاريخ الأصدار : 1443/4/20
رقم الرخصة : 5731443420021494
تاريخ الانتهاء : 1443/10/23

| | | | | | |
|---|---|---|---|---|---|
| ص ل : | شركة تمكين الحديثة للأنابيب | | | | |
| السجل التجاري : | 4030206443 | تاريخه : | 1431/12/22 | تاريخ الانتهاء : | 1448/1/26 |
| ينة الصناعية : | جدة الثانية | | | | |
| العقد : | 813716 | | | | |
| ع العقار : | 0150G00047 | | | | |

روط والأنظمة:

ني هذه الرخصة الإذن بتشغيل المنشأة وأن المرخص له بتشغيل هذه المنشأة هو المشغل الحقيقي له وفق كيانه القانوني وتراخيصه وسجلاته ولا يحق لصاحب المنشأة التنازل عن غيل والرخصة أو أي جزء منها للغير..

لتزم المرخص له بالتقيد بال شروط والالتزامات المكتوبة في هذه الرخصة وبكافة الأنظمة واللوائح والشروط والتعليمات الصادرة من" مدن"، ويتم الرجوع للأنظمة واللوائح السارية المفعول مول بها في المملكة العربية السعودية فيما لم يرد بشأنه تنظيم لدى" مدن."

.يلتزم المرخص له بتجديد هذه الرخصة خلال مدة لا تزيد عن 15 يوما بعد انتهائها.

رسم توضيحي للموقع

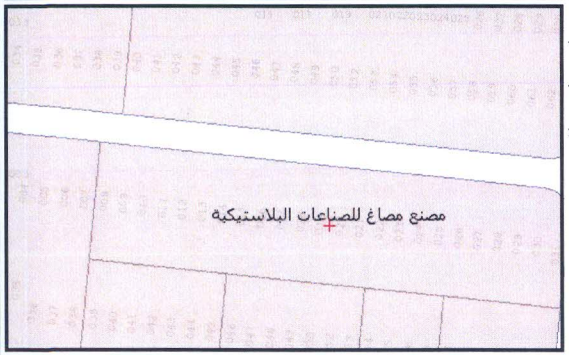


عقد الإيجار ساري حتى : 1451/3/28 هـ

يلزم التحقق من صحة وصلاحية الشهادة عبر زيارة الرابط او عن طريق أستخدام الرمز بالأسفل

Creativity Al Mokhadramin Est.
For Operation And Maintenance
Installation & Maintenance of Firefighting & Alarm Equipment

مؤسسة إبداع المخضرمين
للتشغيل والصيانة
تركيب و صيانة أجهزة ومعدات الاطفاء والإنذار

التاريخ ١٤٤٣/٠٣/١٧هـ الموافق ٢٠٢١/١٠/٢٣م

## ( عقد صيانة وتشغيل ـ رقم ٤٤٣/٤٨ )

## الرقم الضريبي : ٣٠١٠٢٧٩٧٨٦٠٠٠٠٣

بعون الله وتوفيقه تم الاتفاق بين كل من ـ

الطرف الأول : ـ مؤسسة إبداع المخضرمين للتشغيل و الصيانة ومقرها جدة ـ طريق الملك فيصل.

الطرف الثاني : ـ مصاغ للصناعات البلاستيكية ـ المصنع ـ ومقرها المدينة الثالثة.

وكان الاتفاق على النحو التالي :-

| العدد | البيـــــــــــــــان | الكمية |
|---|---|---|
| ١ | مضخة حـريق سعة ( ٧٥٠ جالون ) ثلاثة أنظمة | ١ |
| ٢ | صنـاديق حـريق | ١٥ |
| ٣ | مرشات أوتومتيك | ٨٥٠ |
| ٤ | لوحة تحكم غير معنون سعة ١٦ زون | ٢ |
| ٥ | كاشف دخان وكاشف حراري | ٣٥٠ |
| ٦ | جرس إنذار | ٢٠ |
| ٧ | كاسر زجاج | ٢٠ |
| ٨ | أبواب طوارئ | ١٤ |

أولاً : ـ الالتزام بصيانة وتشغيل أنظمة الإطفاء اليدوي والآلي والإنذار المبكر من الحريق حسب الجدول أعلاه.

ثانياً : ـ الالتزام بالصيانة الدورية بمعدل أربع زيارات لمدة عام مع تقديم تقرير لكل زيارة يقوم بها فريق الصيانة.

ثالثاً : ـ الالتزام بالحضور خلال ( ٢٤ ساعة ) من وقت الإبلاغ للقيام بإصلاح الأعطال إن وجدت.

رابعاً : ـ العقد لا يشمل صيانة الطفايات ( كل ستة أشهر) وتسجل بفاتورة مستقلة.

خامساً : ـ العقد لا يشمل قطع الغيار المطلوبة إن وجدت وتضاف بفاتورة مستقلة عن العقد أو يتم تأمينها عن طريق الطرف الثاني ويتم التركيب مجاناً.

سادساً : ـ العقد لا يشمل توفير الرافعة الشوكية أو ونش لصيانة وسائل السلامة والإطفاء المركبة في الأسقف نظراً لإرتفاع الأسقف.

سابعاً : ـ يلتزم الطرف الثاني بمسؤوليته عن فراغ خزان المياه وانقطاع التيار الكهربائي عن بطارية مضخة الحريق وعدم الإبلاغ الطرف الأول عن الأعطال في حينه.

ثامناً : ـ القيمة الإجمالية مبلغ وقدره عشرة آلاف ريـ ١٠.٠٠٠ ـال فقط غير شامل القيمة الضريبية المضافة.

تاسعاً : ـ يتم دفع قيمـة هذا العقـد بعد الموافقة على العرض وعند توقيع العقد نقـدا أو بموجب شيك أو التحويل على حساب المؤسسة رقم ( SA1480000507608010060976 ).

عاشراً : ـ مدة العقد عام واحد تبدأ بتاريخ ١٤٤٣/٠٣/١٨هـ وتنتهي بتاريخ ١٤٤٤/٠٣/١٧هـ ولا يحق لأحد الطرفين إلغائه إلا بعد إشعار الطرف الآخر بمدة لا تقل عن شهر من تاريخ انتهائه.

الحادي عشر : ـ لا يعتبر هذا العقد نافذاً إلا بعد سداد قيمته بموجب سند قبض.

الثاني عشر : ـ هذا العقد يتكون من نسختين أصليتين لكل طرف نسخة منه.

هذا والله ولي التوفيق .....

الطرف الأول
مؤسسة إبداع المخضرمين
للتشغيل و الصيانة

الطرف الثاني
مصاغ للصناعات البلاستيكية

مؤسسة إبداع المخضرمين التجارية ٤٠٣٠٢٥٣٧٤٩

المملكة العربية السعودية - جدة - حي السروات - شارع السروات - تليفاكس : ٠١٢٦٠٨٤٨٤٥ - جوال : ٠٥٠٣٦٨٦٨٦٩ - س.ت : ٤٠٣٠٢٥٣٧٤٩
Kingdom of Saudi Arabia- Jeddah - Al-Sarwat Dist. - Al-Sarwat St. - TeleFax : 012 6084845 Mobile : 0503686869 - C.R. : 4030253749

Creativity Al Mokhadramin Est.
For Operation And Maintenance
Installation & Maintenance of Firefighting & Alarm Equipment

مؤسسة إبداع المخضرمين
للتشغيل والصيانة
تركيب و صيانة أجهزة ومعدات الاطفاء والإنذار

التاريخ ١٤٤٣/٠٣/١٧هـ الموافق ٢٠٢١/١٠/٢٣م

## ( عقد صيانة وتشغيل ـ رقم ٤٤٣/٤٨ )

**الرقم الضريبي : ٣٠١٠٢٧٩٧٨٦٠٠٠٠٣**

بعون الله وتوفيقه تم الاتفاق بين كل من :ـ

الطرف الأول :ـ مؤسسة إبداع المخضرمين للتشغيل و الصيانة ومقرها جدة ـ طريق الملك فيصل.

الطرف الثاني :ـ مصاغ للصناعات البلاستيكية ـ المصنع ـ ومقرها المدينة الثالثة.

وكان الاتفاق على النحو التالي :-

| العدد | البيـــــــــــــان | الكمية |
|---|---|---|
| ١ | مضخة حـريق سعة ( ٧٥٠ جالون ) ثلاثة أنظمة | ١ |
| ٢ | صنـاديق حـريق | ١٥ |
| ٣ | مرشات أوتومتيك | ٨٥٠ |
| ٤ | لوحة تحكم غير معنون سعة ١٦ زون | ٢ |
| ٥ | كاشف دخان وكاشف حراري | ٣٥٠ |
| ٦ | جرس إنذار | ٢٠ |
| ٧ | كاسر زجاج | ٢٠ |
| ٨ | أبواب طوارئ | ١٤ |

أولاً :ـ الالتزام بصيانة وتشغيل أنظمة الإطفاء اليدوي والآلي والإنذار المبكر من الحريق حسب الجدول أعلاه.

ثانياً :ـ الالتزام بالصيانة الدورية بمعدل أربع زيارات لمدة عام مع تقديم تقرير لكل زيارة يقوم بها فريق الصيانة.

ثالثاً :ـ الالتزام بالحضور خلال ( ٢٤ ساعة ) من وقت الإبلاغ للقيام بإصلاح الأعطال إن وجدت.

رابعاً :ـ العقد لا يشمل صيانة الطفايات ( كل ستة أشهر) وتسجل بفاتورة مستقلة.

خامساً :ـ العقد لا يشمل قطع الغيار المطلوبة إن وجدت وتضاف بفاتورة مستقلة عن العقد أو يتم تأمينها عن طريق الطرف الثاني ويتم التركيب مجاناً.

سادساً :ـ العقد لا يشمل توفير الرافعة الشوكية أو ونش لصيانة وسائل السلامة والإطفاء المركبة في الأسقف نظراً لارتفاع الأسقف.

سابعاً :ـ يلتزم الطرف الثاني بمسؤوليته عن فراغ خزان المياه وانقطاع التيار الكهربائي عن بطارية مضخة الحريق وعدم الإبلاغ الطرف الأول عن الأعطال في حينه.

ثامناً :ـ القيمة الإجمالية مبلغ وقدره عشرة آلاف ريـ ١٠.٠٠٠ ـال فقط غير شامل القيمة الضريبية المضافة.

تاسعاً :ـ يتم دفع قيمـة هذا العقـد بعد الموافقة على العرض وعند توقيع العقد نقـدا أو بموجب شيك أو التحويل على حساب المؤسسة رقم ( SA1480000507608010060976 ).

عاشراً :ـ مدة العقد عام واحد تبدأ بتاريخ ١٤٤٣/٠٣/١٨هـ وتنتهي بتاريخ ١٤٤٤/٠٣/١٧هـ ولا يحق لأحد الطرفين إلغائه إلا بعد إشعار الطرف الآخر بمدة لا تقل عن شهر من تاريخ انتهائه.

الحادي عشر :ـ لا يعتبر هذا العقد نافذاً إلا بعد سداد قيمته بموجب سند قبض.

الثاني عشر :ـ هذا العقد يتكون من نسختين أصليتين لكل طرف نسخة منه.

هذا والله ولي التوفيق .....

الطرف الأول
مؤسسة إبداع المخضرمين
للتشغيل و الصيانة

مؤسسة إبداع المخضرمين التجارية
س.ت ٤٠٣٠٢٥٣٧٤٩

الطرف الثاني
مصاغ للصناعات البلاستيكية

المملكة العربية السعودية - جدة - حي السروات - شارع السروات - تليفاكس : ٠١٢٦٠٨٤٨٤٥ - جوال : ٠٥٠٣٦٨٦٨٦٩ - س.ت : ٤٠٣٠٢٥٣٧٤٩
Kingdom of Saudi Arabia- Jeddah - Al-Sarwat Dist. - Al-Sarwat St. - TeleFax : 012 6084845 Mobile : 0503686869 - C.R. : 4030253749

Creativity Al Mokhadramin Est.
For Operation And Maintenance
Installation & Maintenance of Firefighting & Alarm Equipment

مؤسسة إبداع المخضرمين
للتشغيل والصيانة
تركيب و صيانة أجهزة ومعدات الاطفاء والإنذار

التاريخ ١٤٤٣/٠٣/١٧هـ الموافق ٢٠٢١/١٠/٢٣م

( فاتورة رقم ٤٤٣/٤٨ )

الرقم الضريبي : ٣٠١٠٢٧٩٧٨٦٠٠٠٠٣

المطلوب من عناية السادة الموقرين / مصاغ للصناعات البلاستيكية ـ المصنع

| الرقم | البيان | الكمية | السعر | الإجمالي |
|---|---|---|---|---|
| ١ | قيمة عقد الصيانة والتشغيل السنوي لنظامي الإطفاء اليدوي والآلي ونظام الإنذار المبكر من الحريق في مصاغ للصناعات البلاستيكية ـ المصنع خلال الفترة من ١٤٤٣/٠٣/١٨هـ إلى ١٤٤٤/٠٣/١٧هـ | مجموعة | ١٠.٠٠٠ | ١٠.٠٠٠ |
| ٢ | الإجمالي | | | ١٠.٠٠٠ |
| ٣ | القيمة الضريبية المضافة ١٥٪ | | | ١.٥٠٠ |
| | إجمالي المبلغ أحد عشر ألفاً وخمسمائة ريـ ١١.٥٠٠ ـال فقط | | | |

ملاحظة :ـ يرجى كتابة الشيكات التابعة لنا باسم مؤسسة إبداع المخضرمين للتشغيل و الصيانة أو التحويل لحساب المؤسسة في مصرف الراجحي رقم ( SA1480000507608010060976 )

مؤسسة إبداع المخضرمين
للتشغيل والصيانة

مؤسسة إبداع المخضرمين التجارية
س.ت ٤٠٣٠٢٥٣٧٤٩

المملكة العربية السعودية - جدة - حي السروات - شارع السروات - تليفاكس : ٠١٢٦٠٨٤٨٤٥ - جوال : ٠٥٠٣٦٨٦٨٦٩ - س.ت : ٤٠٣٠٢٥٣٧٤٩
Kingdom of Saudi Arabia- Jeddah - Al-Sarwat Dist. - Al-Sarwat St. - TeleFax : 012 6084845 Mobile : 0503686869 - C.R. : 4030253749

المركز الوطني
للرقابة على الالتزام البيئي
National Center for Environmental Compliance
المملكة العربية السعودية

# تصريح بيئي للتشغيل

| | |
|---|---|
| رقم الصادر | ١٥٠٥٣ |
| تاريخه | ١٤٤٢/٧/٦هـ |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| لمنشأة | شركة تمكين الحديثة للأنابيب | | | | | | |
| | ثانية | | رقم الطلب | ١٤٤٢/٨٦٣١ | | | |
| ان | المدينة الصناعية الثانية - جدة | | هاتف | ٦٠٩٤٠١٧ | | فاكس | ٦٠٩٣٩٦٦ |
| لنشأة | ٢١٠٢٠٢٥٠٤ | | صندوق البريد | ٠٥١٤٤٢ | | الرمز البريدي | ٢١٥٤٣ |
| اثيات | ٣٩,٢٤٩٤٤٥٥ | E | ٢١,١٠٥١٦٩٩٥١ | N | المدينة | جدة | |
| ل التجاري | ٤٠٣٠٢٠٦٤٤٣ | | | | مصدرة | جدة | تاريخه ١٤٣١/١٢/٢٢هـ |
| ط | انتاج أنابيب الي في سي (PVC) مختلفة الأقطار | | | | | | |
| لإجراء | تعديل | | | | | | |

، المركز الوطني للرقابة على الالتزام البيئي على النشاط الموضح أعلاه من الناحية البيئية مع مراعاة اللوائح والأنظمة الصادرة من الجهات الأخرى ذات العلاقة
إم بنظام البيئة ولوائحه التنفيذية والاشتراطات المرفقة مع هذا التصريح وتنتهي صلاحيته في١٤٤٤/٦/٢٨هـ

مدير عام التراخيص والتصاريح

أنور بن مبخوت النهدي

المركز الوطني للرقابة على الالتزام البيئي
الختم
إدارة التراخيص والتصاريح

## إشتراطات تصريح بيئي للتشغيل

**اسم المنشأة : شركة تمكين الحديثة للأنابيب**

**نوع النشاط :انتاج أنابيب البي في سي ( PVC ) مختلفة الأقطار**

١ .الالتزام بالمقاييس والمعايير والاشتراطات الصادرة من المركز الوطني للرقابة على الالتزام البيئي .

٢ .السماح للفنيين و المختصين بالمركز بالدخول للمنشأة في أي وقت .

٣ .في حالة أي تعديل أو تغيير على نشاط ومهام المنشأة او في نوعية الخام او الإنتاج او عند عمل أي توسعة او إضافة للمشروع دون إبلاغ المركزمسبقاً بذلك فإن هذه الموافقة البيئية تعتبر لاغية.

٤ .يجب اشعار المركز مسبقاً عند الرغبة في استخدام او استرجاع أي مخلفات صناعية ضمن عمليات التصنيع واطلاع مختصينا على التقنية والطريقة المتبعة في هذا الخصوص.

٥ .الالتزام التام بما جاء في الدراسات والتقارير الفنية المقدمة عند طلب الموافقة فيما يتعلق بتشغيل وصيانة انظمة كبح الملوثات وبالطرق المستخدمة للتخلص من المخلفات الغير قابلة للاسترجاع من قبل احدى الجهات المؤهلة لدى المركز في مجال التخلص من النفايات الصناعية والخطرة.

٦ .الإلتزام بإعداد سجل بيئي للمنشأة وتقديمه متى دعت الحاجة لمختصي المركز عند الزيارة التفتيشية او طلب تجديد الموافقة البيئية.

٧ .الإلتزام بتضمن العقود والفواتير الموثقة بأنواع وكميات المخلفات الصلبة والسائلة الخطرة الناتجة عن المنشأة للفترة الزمنية السابقة للتجديد من الجهات المؤهلة من قبل المركز الوطني للرقابة على الالتزام البيئي وتضمنها في السجل البيئي للمنشأة.

٨ .الإلتزام بتنفيذ خطة الرصد البيئي والإدارة البيئية للمنشأة وبما ورد في الدراسة وملحقاتها من التوصيات.

٩ .الإلتزام بتخصيص مستودعات ومخازن لحفظ المواد الخام والمواد المنتجة تتلائم مع طبيعة المواد ومواصفاتها ودرجة خطورتها حسب صفيحة تداول الأمن للمواد.

١٠ .الالتزام باستخدام وسائل السلامه والصحة المهنية والادوات الخاصة بمنع التلوث بالضوضاء للعاملين بالمنشأة

١١ .الالتزام بعمل صيانة بصفة دورية للالات والمعدات واجهزة كبح الملوثات بالمصنع وتضمينها في السجل البيئي للمنشأة .

١٢ .الالتزام بتزويد وحدات المصنع باللوحات الارشادية والتحذيرية وبيانات السلامه المهنية ورسم الخطوط والعلامات الارضية التوضيحية لمناطق الانتاج والتخزين وممرات الموظفين ونطاق الاشتراطات والالات العاملة بالموقع .

١٣ .الالتزام بعمل قياسات بصفة دورية كل ستة اشهر للانبعاثات الهوائية والضوضاء بالمصنع

١٤ .الإلتزام بتنفيذ جميع الإشتراطات المذكورة وفي حال الإخلال بها سيعرض المنشأة لإيقاع العقوبة عليها حسب نظام البيئة.

وزارة الصناعة والثروة المعدنية
Ministry of Industry and Mineral Resources

VISION رؤية 2030
المملكة العربية السعودية
KINGDOM OF SAUDI ARABIA

# ترخيص منشأة صناعية

## استثمار وطني

| | | | | | |
|---|---|---|---|---|---|
| رمز المنشأة | ٣٥١٣٦٣ | تاريخ الترخيص | ١٤٣٥-٠٧-٠٧ | تاريخ القرار | ١٤٤٣-٠٣-٢١ |
| نوع القرار | تعديل | رقم القرار | ٤٣١١٠٢١١٥٢١٥ | تاريخ الانتهاء | ١٤٤٦-٠٣-١٨ |

| | | | |
|---|---|---|---|
| اسم المنشأة الصناعية | شركة تمكين الحديثة للأنابيب | هاتف | +٩٦٦٥٠٢٤٤٥٥٦١ |
| السجل التجاري للمنشأة الصناعية | ٤٠٣٠٢٠٦٤٤٣ | فاكس | |
| مالك المنشأة | شركة تمكين الحديثة للأنابيب | موقع المنشأة الصناعية | (N21.105126488659426 ,E39.250581628256214) |
| رقم السجل التجاري الرئيسي | ٤٠٣٠٢٠٦٤٤٣ | المنطقة | منطقة مكة المكرمة |
| النشاط الرئيسي | صنع المنتجات اللدائنية / ٢٢٢٠ | المدينة | جدة |

| | | |
|---|---|---|
| عدد العمالة | ٣٣ | ثلاثة و ثلاثون فرداً |
| حجم الاستثمار | ٢٩٠٠٧٨٦٨.٠٠ | تسعة و عشرون مليون و سبعة ألفا و ثمانمائة و ثمانية و ستون ريال |

| رمز المنتج | وصف المنتج | النشاط الصناعي | الطاقة الانتاجية | الوحدة |
|---|---|---|---|---|
| ٣٩١٧٢٣٠٠ | انابيب بلاستيكية مختلفة | ٢٢٢٠٢٠ / صناعة مواسير وخراطيم وأنابيب بلاستيكية ووصلاتها ولوازمها | ٤٠٠٠.٠ | طن |
| ٣٩١٧٤٠٠٠ | قطع ولوازم بلاستيكية للانابيب | ٢٢٢٠٢٠ / صناعة مواسير وخراطيم وأنابيب بلاستيكية ووصلاتها ولوازمها | ٢٠٠٠.٠ | طن |

وزير الصناعة والثروة المعدنية

بندر بن إبراهيم الخريف

# التعليمات الخاصة بتنفيذ الترخيص

١. الالتزام بمواد قانون (نظام) التنظيم الصناعي الموحد لدول مجلس التعاون لدول الخليج العربية ولائحته التنفذية.
٢. عدم إجراء أي توسعة أو تعديل فى المنتجات قبل الحصول على موافقة الوزارة.
٣. الالتزام بتحديث بيانات المصنع كل ستة اشهر من خلال موقع الوزارة الالكتروني.
٤. التزام مطابقة المنتجات للمواصفات والمقاييس المعتمدة أو المواصفات المتبناة من الهيئة السعودية للمواصفات والمقاييس.
٥. الالتزام بمواد النظام العام للبيئة ولائحته التنفيذية للمحافظة على البيئة من التلوث.
٦. الالتزام بالأنظمة والتعليمات ولوائح السلامة والأمن الصناعي والصحة العامة.
٧. ان تكون حسابات المشروع الصناعي منتظمة وفقاً للأصول المحاسبية و القواعد القانونية المرعية وأن يزود الوزارة بالميزانية العمومية مصادق عليها من محاسب قانوني لكل سنة مالية.
٨. عدم إساءة استعمال المزايا الممنوحة للمشروع.
٩. تزويد الوزارة بما تطلبه من بيانات كاملة وصحيحة عن المشروع.
١٠. السماح لموظفي الوزارة بدخول المشروع الصناعي والإطلاع على السجلات والمستندات والحسابات ومراقبة عملية الإنتاج وغير ذلك من نشاطات المشروع.
١١. لايجوز إقامة مشروع صناعي أو توسعته أو تطويره أو تغيير منتجاته أو دمجه بمشروع صناعي

مجلس الغرف السعودية
Council of Saudi Chambers

مركز الترقيم السعودي
Saudi Arabia

# MEMBERSHIP CERTIFICATE

# شهادة عضوية

يشهد مركز الترقيم السعودي بأن / **شركة تمكين الحديثة للأنابيب**

عضو في المركز بعضوية رقم / **628700985**

للفترة من **1443/05/27** إلى **1444/06/07** الموافق **2022/01/01** إلى **2022/12/31**

مدير
مركز الترقيم السعودي

الختم

مجلس الغرف السعودية
مركز الترقيم السعودي
Saudi Arabia
ص.ب ١٦٦٨٢ الرياض ١١٤٧٤

**This document is auto generated**
**تم إنشاء هذا المستند تلقائيا**

www.gs1.org.sa

gs1@csc.org.sa

غرفة جدة
JEDDAH CHAMBER
— 1946 —

VISION رؤية 2030
المملكة العربية السعودية
KINGDOM OF SAUDI ARABIA

# Membership Certificate شهادة عضوية
## Second Class الدرجة الثانية

This is to certify that نشهد بأن

شركة تمكين الحديثة للأنابيب

---

Is a registered member مسجل لدينا

| | | |
|---|---|---|
| Unified Number | 7014216613 | رقم المنشأة |
| Date of Subscription | 09/07/1433 - 2012/05/30 | تاريخ الاشتراك |
| Expiry Date | 26/01/1448 - 2026/07/11 | تاريخ الانتهاء |
| Commercial Record/ License | 4030206443 | السجل التجاري / الرخصة |
| Release Date | 22/12/1431 - 2010/11/28 | تاريخ الاصدار |
| Expiry Date | 26/01/1448 - 2026/07/11 | تاريخ الانتهاء |

Signature التوقيع

Stamp الختم

An electronic certificate, Scan the code to check the certificate's validity شهادة إلكترونية ، يمكنك مسح الرمز للتأكد من صحة الشهادة

المؤسسة العامة للتأمينات الاجتماعية
General Organization for Social Insurance

التاريخ ١٤٤٣/٠٧/١٤
الموافق ١٥/٠٢/٢٠٢٢
رمز الشهادة ٤٤١٩٢٢١٠

# شهادة

إسم المنشأة : شركة تمكين الحديثة للأنابيب
ص.ب : ٥١٤٤٢ جدة ٢١٥٤٣
السعودية
رقم الإشتراك : ٥٠٧٩٩٠٦٧٣
رقم السجل التجاري: ٤٠٣٠٢٠٦٤٤٣

مصدره :

| | رقما | كتابة |
|---|---|---|
| عدد المشتركين السعوديين | ١٠ | عشره مشتركين |
| عدد المشتركين غير السعوديين | ٢٧ | سبعة و عشرون مشتركا |
| المجموع | ٣٧ | سبعة و ثلاثون مشتركا |

تشهد المؤسسة العامة للتأمينات الإجتماعية بأن المنشأة المذكورة أعلاه قد أوفت بإلتزاماتها تجاه المؤسسة وفق البيانات المقدمة منها حتى تاريخ إصدار هذه الشهادة ، والتي تم منحها لتقديمها لأية جهة تطلبها ، وهي صالحة لجميع الأغراض التي نص عليها نظام التأمينات الإجتماعية في المادة (١٩/٦) منه.

هذه الشهادة سارية المفعول حتى ١٤٤٣/٠٨/١٣ هـ.

يلزم التحقق من صحة وصلاحية الشهادة عبر زيارة الرابط أدناه في الموقع الإلكتروني للمؤسسة العامة للتأمينات الإجتماعية أو عن طريق استخدام الرمز المعرف التالي :

www.gosi.gov.sa/vc

( الشهادة معتمدة من صاحب الصلاحية ولا تحتاج إلى توقيع أو ختم )

شهادة

www.gosi.gov.sa
800 1243344

تعد هذه الشهادة من الوثائق الالكترونية الحكومية الرسمية ، ويحظر قطعيا تقليدها أو إدخال أي تعديلات عليها سواء بالإضافة أو الحذف أو التغيير في بياناتها أو غير ذلك من انواع التعديل ، وتعد الشهادة لاغية إذا شابها شيء من ذلك ، كما تعرض صاحبها للملاحقة النظامية أمام الجهات المختصة بالإضافة إلى مايفرضه نظام التأمينات الاجتماعية من عقوبات ، ولايجوز تداول الشهادة إلا في الأغراض التي أصدرت لأجلها وفقا لأحكام نظام التأمينات الاجتماعية ، والمؤسسة العامة للتأمينات الاجتماعية غير مسؤوله عن أي آثار أخرى مترتبة قبل الغير عن الشهادة وغير مسؤولة عن أي عملية تزوير أو تعديل تتم على البيانات الواردة فيها .

GOSI
التأمينات الإلكترونية
بإمكانك من مكانك

# 04 ✧ Certification.

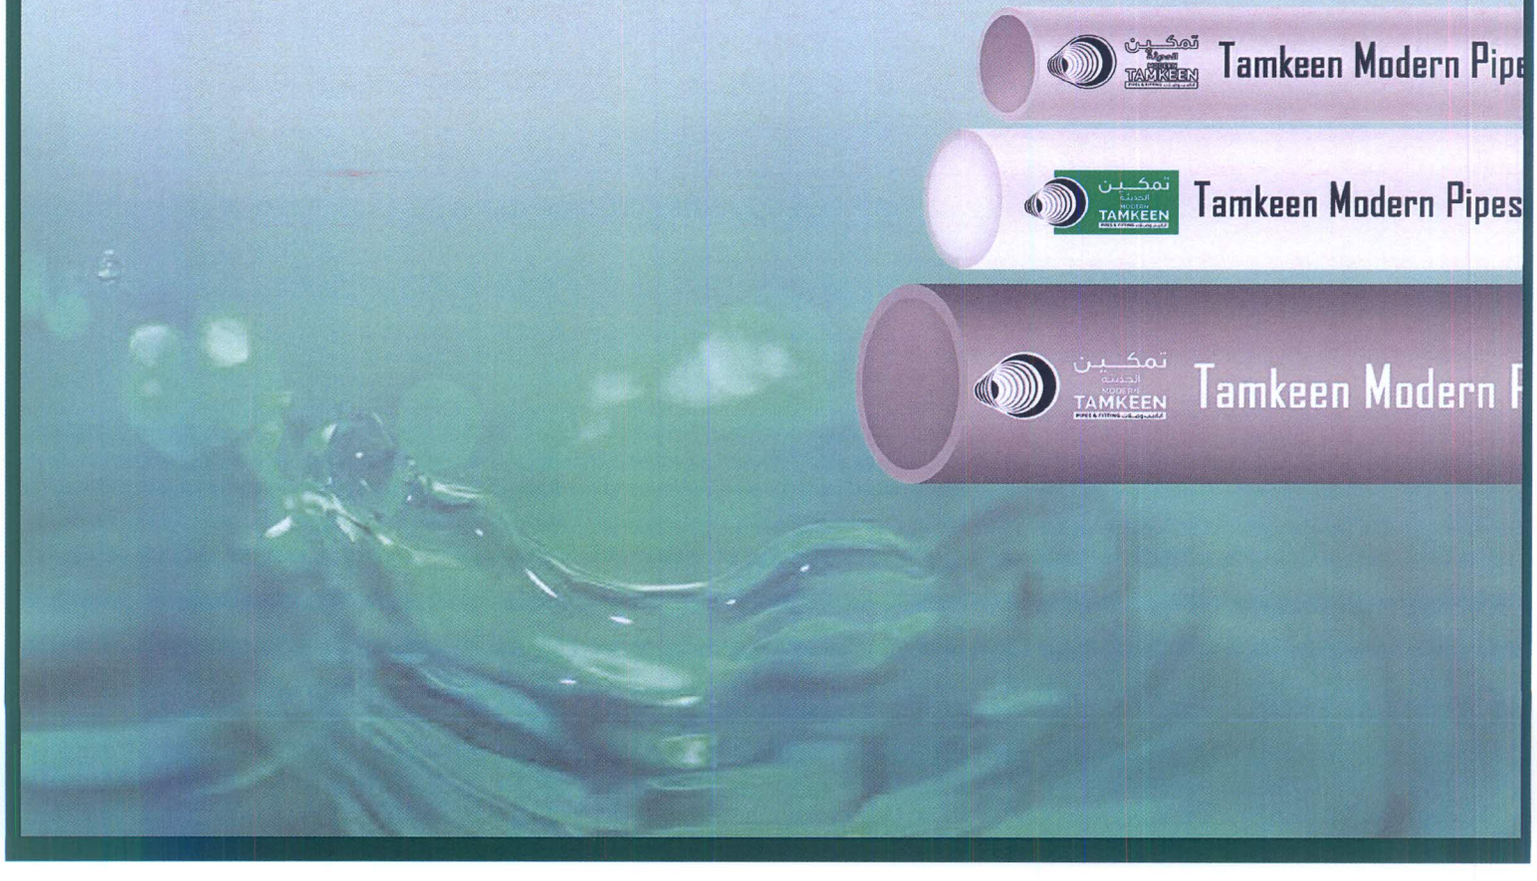

TÜV NORD

# CERTIFICATE

Management system as per
**ISO 9001 : 2015**

In accordance with TÜV NORD CERT procedures, it is hereby certified that

**Tamkeen Modern Pipes Co.**
**Street 35, P. O. Box 15442**
**21543 Jeddah**
**Kingdom of Saudi Arabia**

تمكين الحديثة
MODERN TAMKEEN
PIPES & FITTING أنابيب وصلات

applies a management system in line with the above standard for the following scope

**UPVC pipes manufacturer and supply for complete plastic piping systems (water supply, waste drainage, ventilation, sewer & irrigation, electric, housing, telecom, construction and industries)**

Certificate Registration No. 44 100 16570010
Audit Report No. 5700 2899

Valid from 2021-11-01
Valid until 2022-04-24
Initial certification 2016

M. Menshawy

Certification Body
at TÜV NORD CERT GmbH

Dammam, 2021-11-01

This certification was conducted in accordance with the TÜV NORD CERT auditing and certification procedures and is subject to regular surveillance audits.

TÜV NORD CERT GmbH Langemarckstraße 20 45141 Essen www.tuev-nord-cert.com

MEMBER OF MULTILATERAL RECOGNITION ARRANGEMENT IAF

DAkkS Deutsche Akkreditierungsstelle D-ZM-12007-01-01

الهيئة السعودية للمواصفات والمقاييس والجودة
Saudi Standards, Metrology and Quality Org.

# شهـادة ترخيص باسـتعمال علامة الجودة
# License For Use of The Quality Mark

**License Number:** 1-000004030206443-1437 **رقم الترخيص:**

SASO certifies that it has granted the right to use (SASO) quality mark on the following products, after fulfilling the required requirements according to the related normative references:

تشـهد الهيئة السـعودية للمواصفات والمقاييس والجودة بأنها رخصت باستعمال علامـة الجـودة على المنتجـات الموضحة أدنـاه بعد اسـتيفاءها للمتطلبـات اللازمة وفق المراجع القياسية الخاصة بها:

| | | |
|---|---|---|
| The Establishment: | شركة تمكين الحديثة للانابيب | المنشآة: |
| The Establishment's Address: | جدة – المدينة الصناعية الثانية – المرحلة الثانية | عنوان المنشآة: |
| Production Line Location: | جدة – المدينة الصناعية الثانية – المرحلة الثانية | موقع خط الإنتاج: |
| Normative References: | SASO ISO 1452-1/2009, SASO ISO 1452-2/2011 | المراجع القياسية: |
| The Trade Mark: | - | العلامة التجارية: |
| The Product: | أنظمة الأنابيب البلاستيكية لإمدادات المياه-UPVC | المنتج: (تفاصيل المنتج في الملحق) |
| Date of Granting: | 2016/06/27 | تاريخ المنح: |
| Date of Renwal: | 2019/05/26 | تاريخ التجديد: |
| Date of Expiry: | 2022/05/25 | تاريخ الانتهاء: |

نائب محافظ الهيئة للمطابقة والجودة
Vice Governor of Conformity and Quality Affairs

المهندس/ سعود بن راشد العسكر
Eng. Saud R. AlAskar

الإدارة العامة لمنح الشهادات
الهيئة السعودية للمواصفات والمقاييس والجودة
Saudi Standards, Metrology and Quality Org.

تخضع هذه الشهادة خلال مدة سريانها للأنظمة واللوائح ذات العلاقة في المملكة العربية السعودية وأي تعليمات أو تعديلات تصدرها الهيئة.
This certificate shall be subject to the relevant laws and regulations of Saudi Arabia and any instructions or amendments issued by SASO, during its validity.

www.saso.gov.sa

Visit SASO website (www.saso.gov.sa) to verify this certification or using an (Takkad) application.
Any changes or modification on this certificate will affect its validity.
P.O.Box 3437 Riyadh 11471 KSA
Tel: 920009085 Fax: +966114520086



QMS-F-10-10
Issue # 4 Date 06/02/1434
Rev # 4 Date 11/02/1441

للتأكد من صحة هذه الشهادة يرجى زيارة موقعنا على الانترنت (www.saso.gov.sa) أو من خلال تطبيق (تأكد).
أي كشط أو تغيير في هذه الشهادة يلغيها.
ص.ب ٣٤٣٧ الرياض ١١٤٧١ المملكة العربية السعودية
هاتف: ٩٢٠٠٠٩٠٨٥ فاكس ٩٦٦١١٤٥٢٠٠٨٦+

الهيئة السعودية للمواصفات والمقاييس والجودة
Saudi Standards, Metrology and Quality Org.

# ملحق شهادة ترخيص باستعمال علامة الجودة
# Appendix (License For Use of The Quality Mark)

| | | |
|---|---|---|
| The establishment: | شركة تمكين الحديثة للانابيب | المنشأة: |
| Certificate No.: | 1-000004030206443-1437 | رقم الترخيص: |
| Certificate Expiration Date: | 2022/05/25 | تاريخ انتهاء الترخيص: |
| Product: | أنظمة الأنابيب البلاستيكية لإمدادات المياه-UPVC | المنتج: |
| Brand Name: | - | العلامة التجارية: |

| م No. | الصنف Classification | المقاسات Size | تاريخ المنح/التجديد Date of Granting/Renewal |
|---|---|---|---|
| 1 | صنف (SDR 13.6)، الضغط التشغيلي (PN 16) | (20، 25، 32، 50، 63، 75، 90) مم. | 2019/05/26 |
| 2 | صنف (SDR 13.6)، الضغط التشغيلي (PN 20) | (110، 160، 200، 225، 250، 315، 400) مم. | 2019/05/26 |
| 3 | صنف (SDR 26)، الضغط التشغيلي (PN 8) | (50) مم. | 2019/05/26 |
| 4 | صنف (SDR 17)، الضغط التشغيلي (PN 12.5) | (25، 32) مم. | 2019/05/26 |
| 5 | صنف (SDR 33)، الضغط التشغيلي (PN 8) | (110، 160، 200، 225، 250، 315، 400، 500، 630) مم. | 2019/05/26 |
| 6 | صنف (SDR 33)، الضغط التشغيلي (PN 6) | (63، 75، 90) مم. | 2019/05/26 |
| 7 | صنف (SDR 41)، الضغط التشغيلي (PN 6) | (110، 160، 200، 250، 315، 400، 630) مم. | 2019/05/26 |
| 8 | صنف (SDR 21)، الضغط التشغيلي (PN 10) | (40، 50، 63، 75، 90) مم. | 2019/05/26 |
| 9 | صنف (SDR 21)، الضغط التشغيلي (PN 12.5) | (110، 160، 200، 225، 250، 315، 400، 500) مم. | 2019/05/26 |

الأدارة العامة لمنح الشهادات
الهيئة السعودية للمواصفات والمقاييس والجودة
Saudi Standards, Metrology and Quality Org.



www.saso.gov.sa
Visit SASO website (www.saso.gov.sa) to verify this certification or using an (Takkad) application.
Any changes or modification on this certificate will affect its validity.
P.O.Box 3437 Riyadh 11471 KSA
Tel +9200009085 Fax +966113520056

QMS-F-10-10
Issue # 4 Date 08/02/1434
Rev. # 4 Date 11/02/1441

للتأكد من صحة هذه الشهادة يرجى زيارة موقعنا على الانترنت (www.saso.gov.sa) أو من خلال تطبيق (تأكد).
اي كشط او تغيير في هذه الشهادة يلغيها.
ص.ب ٣٤٣٧ الرياض ١١٤٧١ المملكة العربية السعودية
هاتف: ٨٥ ٠٠٩٠٠٨٥ ٩٢ فاكس ٨٦ ٠٠٩٦٦١١٤٥٢٠٠٥٦

# 05 ✧ Project Approvals

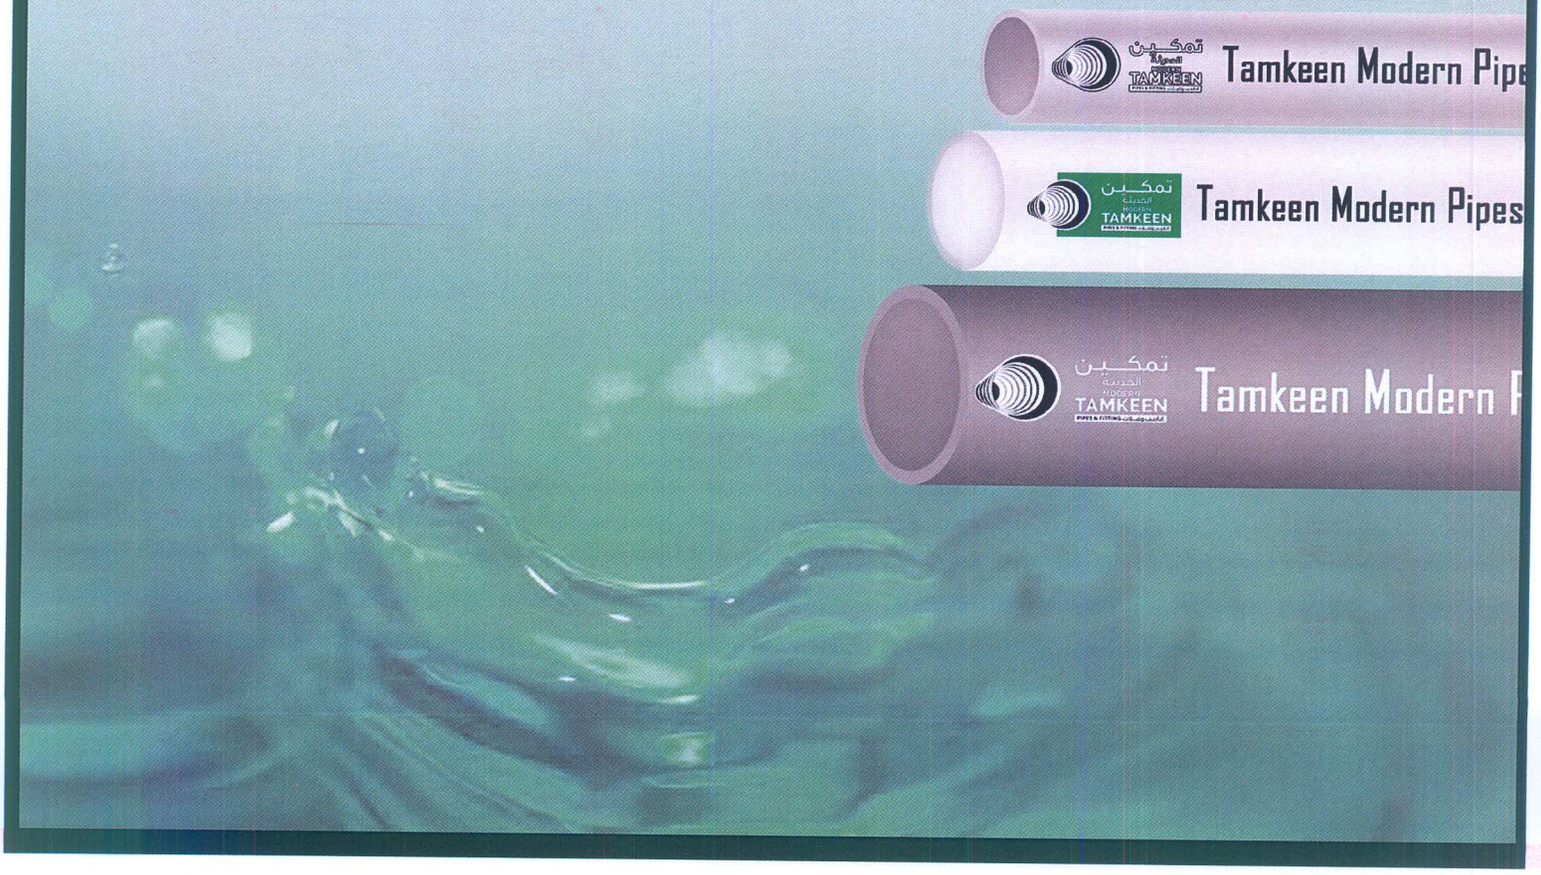

| PROJECT: | CLENT: | Ref. No. |
|---|---|---|
| FORMULA 1 SAUDI ARABIAN GRAND PRIX 2021 | الاتحاد السعودي للسيارات والدراجات النارية Saudi Automobile & Motorcycle Federation | M-MAR-SLF217-F1ZG-AAC-0010 |

| PROJECT MANAGER | PROJECT MANAGER | RECEIVED |
|---|---|---|
| Eng'r. Mahmoud Yahya | Eng'r. Ahmed Emara | 17010 |
| CONTRACTOR: | CONSULTANT: | |
| Alaa Alafaq for contracting Formula 1 Saudi Arabian Grand Prix 2021 | Saudi Landscape Co. | RECEIVED 17010 29 SEP 2021 Saudilandscape Co |

# MATERIAL APPROVAL REQUEST

**DISCIPLINE:**

| Civil ☐ | Architectural ☐ | Electrical ☐ | Mechanical ☑ | Other ☐ |
|---|---|---|---|---|

| LOCATION | ZONE | LOT | BLOCK | BLDG | FLOOR | AXES | DWG. |
|---|---|---|---|---|---|---|---|
| | Z(1, 3, 4, 5) | | | | | | |

**The material submitted for approval has been checked for conformity with drawings and specifications and any deviations noted herein:**

| | |
|---|---|
| Material Description: | UPVC Pipes (25, 32, 50, 63, 75, 90mm dia.) & fittings |
| Type of Material: | Irrigation Materials – uPVC Pipes & Fittings |
| Drawing Reference: | SL-210006-F1-IFC-Z1-IR- 200 TO 206, SL-210006-F1-IFC-Z1-IR- 300 TO 306 |
| Specification Clause: | SAMF1/Z1/IRR/1.1 to 1.6 |
| Fixing Location: | ZONE 1, 3, 4, 5 |

| | | |
|---|---|---|
| Technical Literature Attached | YES ☑ | NO ☐ |
| Sample Attached | YES ☑ | NO ☐ |
| Compliance Sheet Attached | YES ☐ | NO ☑ |

| | | | |
|---|---|---|---|
| Manufacturer: | Masag Factory for Plastic Industries | | |
| Country of Origin: | Saudi Arabia | | |
| Local Agent: | Masag Factory for Plastic Industries | | |
| Type of Shipment | Land ☐ | Sea ☒ | Air ☐ |
| Anticipated Period of delivery from placing order: | | | |
| Anticipated Period when material to be used on site: | | | |

| | | |
|---|---|---|
| Submitted By: Engr. Mahmoud Yahya | Date: 27-09-2021 | Signature: |

**COMMENTS:**

1. CONTRACTOR TO SUPPLY ALL PIPES WHERE EVER SHOWN ON THE SHOP DRAWINGS
2. CONTRACTOR TO PROVIDE SASO CERTIFICATE FOR THE MATERIALS MATERIAL SHALL BE UL
3. MATERIAL DELIVERY AND STORAGE AS PER MATERIAL/ FACTORY REQUIREMENTS

| Global Status: | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | ☐ | A= Approved | ☒ | AAN=Approved as Noted | ☐ | R&R=Revise, Re-Submit | ☐ | CA=Conditional Approval |
| | ☐ | NAR=Not Approved, Resubmit | ☐ | R=Rejected | ☐ | NFD=Need Further Detail | ☐ | NFI=Noted for info |

| | | |
|---|---|---|
| Reviewed By: H.L. CARINO | Date: 30/09/2021 | Signature: |
| Approved By: ENG'R. DANTES CAPARAL | Date: 03/10/21 | Signature: |



4. CONTRACTOR SHALL USE APPROVED SOLVENT CEMENT AND CLEANER

5.

| COMPLIANCE SHEET / MATERIAL | | CS/MT: |
|---|---|---|
| **Specification Reference Number:** | | |
| **Contract Specifications** | **Proposed Specifications** | **Remarks** |
| | | |
| **Contractor's Representative:** | **Date:** | **Signature:** |

| **COMMENTS:** |
|---|
| |

Alaa Alafaq for contracting
Formula 1 Saudi Arabian Grand Prix 2021

IMSC

الولي al Oula

NHC

ECEC East Consulting Engineering Company | شركة الشرق للاستشارات المهنية

ALMUHANADIA HOUSING PROJECT

# MATERIALS SUBMITTAL

■ New Submittal | Submittal No : MP-MS-MP-005 | PREV. Sibmittal :

☐ Re Submittal | Date : 05/10/2021 | PREV. Submittal Date :

**Submittal reason :** ☐ INFO ☐ NOTES ■ APPROVAL

**major :**

☐ CV ☐ AR ☐ ST ☐ AC ☒ EL ■ PL ☐

OTHER.....

**Attachments**

☐ Brochure ☐ Tech. info ■ Sample ☐ Certificate ☐ Drawing ☐

Calculations

| Materials/Tools | Material - Name/ Number / Description | Source | Supplier/ Manufacturer / Tel - No | Specs.Ref | Code Status |
|---|---|---|---|---|---|
| | UPVC/CPVC Pipes & Fittings | Tamdeed | Tamdeed | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

**CONTRACTOR** | **Name : Engr. Khalid Yazidi** | **Date : 05/10/2021** | **Signature :** | **Stamp :**

مؤسسة توفيق الصم للمقاولات
TMSC Contracting Est.
إسكان المهندسين
4030262701

**Consultant recommendation :**

Classy ~~CPVC~~ UPVC مواسير
Classy CPVC مواسير
6/10/2021

**Name :** Mahmoud Farall **Date :** 6/10/2021 **Signature :** **Stamp :**

Almuhanadia Project - Jeddah
ECEC
Consulting Engineering Center ECEC

**Client**

**Name :** **Date :** **Signature :** **Stamp :**

**Approval Situation :**

A) ☐ Approved B) ☑ Approved as noted

C) ☐ Not Approved Resubmittal Required D) ☐ Rejected E) ☐ No Action

6/10/21

RECIEVED
0 OCT 2021
مؤسسة توفيق الصم

**Client: Copy with Stamp Consultant:original Contractor : Copy with stamp**

**( Authority to proceed with work does not relieve the contractor from contractual responsibilities )**

T + 966 (11)4772215 F +966 (11) 4777145 E ecec@ecec.com.sa
11441 Riyadh, P. O. Box 1973 Kingdom of Saudi Arabia

جدارة
مشروع أعالي جدة

# MATERIAL SUBMITTAL

| القسم TRADE | MECHANICAL | Submittal No : رقم الطلب | Revision No : مراجعة رقم |
|---|---|---|---|
| | | NEA-GS-508 | 1 |

| Specs. Code & Ref / رمز التوصيف و المرجع | B.O.Q. Code Ref / رمز التصنيف في جدول الكميات | Part No / رقم القسم | Date Submitted: 12/DEC/2021 تاريخ التقديم: |
|---|---|---|---|
| | | | Date Returned: تاريخ الارجاع: |

| No. رقم | Description البيان | Details التفاصيل |
|---|---|---|
| | APPROVAL FOR UPVC PIPE | **Submitted for** الغاية من التقديم |
| | 1. 160 X 11.80 MM, PN 20/S (SDR 13.6) SOLVENT & RUBBER JOINT | Approval الموفقة ■ |
| | 2. 110 X 5.3 MM, PN 12.5/S: 10(SDR 21) SOLVENT & RUBBER JOINT | Information الاستعلام ☐ |
| | | Coordination التوافق ☐ |
| | | Review المراجعة ☐ |
| | | **Trade** الموضوع |
| | COMPANY NAME: TAMDEED | Structural عظم/إنشائي ☐ |
| | | Architectural معماري ☐ |
| | | Mechanical / Plumbing ميكانيك/سباكة ■ |
| | | Civil defence ☐ |
| | | Electrical كهرباء ☐ |
| | ATTACHEMENT: | **Attachment** المرفقات |
| | TECHNICAL DATA | Certificates الشهادات ■ |
| | MATERIAL SAMPLE | Tech. Brochure منشور تقني ■ |
| | | Manufacturer's Data & Specs. الصانع والمواصفات ☐ |
| | | Shop Drawings الرسم البياني ☐ |
| | | Sample عينة ☐ |
| | | Manual كتيب تعريف ☐ |
| | | Data file ملف بيانات ☐ |
| | | As Built Drawings مخطط على الواقع ☐ |
| | | Warranty ضمان ☐ |
| | | Others (Specify) أخرى (تذكر): ☐ |

15 DEC 2021

RECEIVED
Solaiman A. El Khereiji
SAK Consultant

شركة أبياتنا العقارية
Abyatona Real Estate Co.
مشروع الأمير فواز الجنوب - أعالي جدة
خاص باعتماد المخططات الفنية
101-504729

For Contractor: المقاول

Prepared by / إعداد | Submitted By / تقديم | Noted by / الملاحظ

14-12-2021

Resident Engineer / مهندس التوقيع | مدير المكتب الفني Tech. Off. Manager | مدير المشروع Project Manager 14/12/2021

USE ONLY / خاص بالاستشاري | Received by / المستلم

Name / الاسم | Signature/التوقيع | Date: / /2019 التاريخ:

Remarks: Approved as noted:

* U-PVC pipe from Tamdeed of size Φ160mm and 110mm accepted as noted.
* Φ160mm UPVC Class V underground Solvent joint
* Φ110mm UPVC Class IV above ground Rubber joint
follow standards & specifications and UPC code

aken / الإجراء المتخذ

التوقيع | Resident Engineer مهندس الموقع | Signature / التوقيع

مكتب سليمان عبد الله الخريجي الإستشاري
س.ت ٤٠٣٠٢٣٩٤٣١
C.R. 4030239431

/ / التاريخ | Date / / التاريخ 23/12/2021

| | | |
|---|---|---|
| Approved | مقبول ☐ | A |
| Approved with comments | مقبول مع وجود ملاحظات ☑ | B |
| Revise and Resubmit | يصحح ويعاد تقديمه ☐ | C |
| Rejected | مرفوض ☐ | D |

Approval, corrections or comments made relative to submittals during this review do not relieve the Contractor from compliance with the requirements of the drawings or specifications
This check is only for review of general performance with the design concept of the project and general compliance with the information given in the Contract documents.
The Contractor is responsible for confirming and correlating all quantities and dimensions, selecting fabrication processes and techniques of construction, coordinating his work with that of other trades, and performing his work in a safe, timely, and satisfactory manner

bution / نسخة إلى | Received / المستلم

☐ OWNER المالك ☐ | ☐ CONSULTANT الاستشاري ☐ | ☐ CONTRACTOR المقاول ☐ | Contractor's Signature / توقيع المقاول ١٢/٢٣

JHP-QC-IF-005-0

| | | |
|---|---|---|
| اسم المشروع: تطوير واعادة تأهيل الطرق الرئيسية (جنوب) المدينة المنورة<br>رقم المشروع: ٩ ٨ ٠ ٨ ٣ | **طلب اعتماد عينة** | رقم النموذج.....<br>الرقم الصادر.....<br>التاريخ..... |
| المقاول: شركة رواسي المدن للتجارة والصناعة والمقاولات | أمانة منطقة المدينة المنورة | الاستشاري: شركة مشاري الشثري للاستشارات الهندسية. |

تقدم المقاول بهذا الطلب لفحص العينات الموضحة أدناه واعتمادها

| مسمى البند | موقع العينة | صورة العينة | رقم البند بالمقايسة |
|---|---|---|---|
| | | اسم المورد : مصنع مصانع للصناعات البلاستيكيه (تمديد) | ٤٣-٣٨ |
| ٠١٠٣٨ | | توريد وتركيب انابيب بلاستيكية للخطوط الرئيسية قطر ٢٠٠ مم | |
| ٠١٠٣٩ | | توريد وتركيب انابيب بلاستيكية للخطوط الرئيسية قطر ١٦٠ مم | |
| ٠١٠٤٠ | | توريد وتركيب انابيب بلاستيكية للخطوط الرئيسية قطر ١١٠ مم | |
| ٠١٠٤١ | | توريد وتركيب انابيب بلاستيكية للخطوط الفرعية قطر ٦٣ مم | |
| ٠١٠٤٢ | | توريد وتركيب انابيب بلاستيكية للخطوط الفرعية قطر ٥٠ مم | |
| ٠١٠٤٣ | | توريد وتركيب انابيب بلاستيكية للخطوط الفرعية قطر ٣٢ مم | |

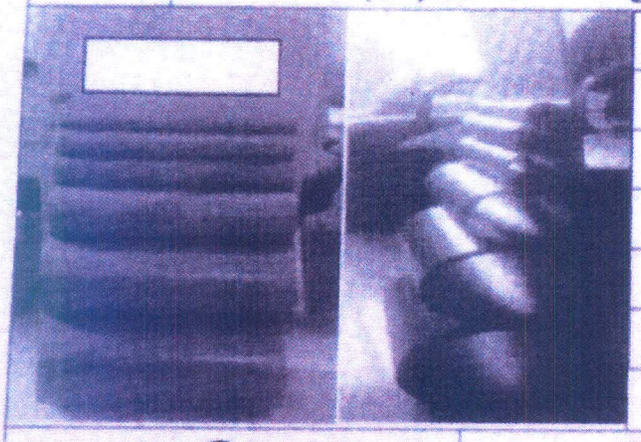

| الاستشارى | تعتمد | تعتمد مع وجود ملحوظات | لا تعتمد |
|---|---|---|---|
| | ✓ | ○ | ○ |

ملحوظات الإستشارى

لا يمكن الاعتماد حسب شروط ومواصفات

| | |
|---|---|
| اعتماد المقاول :<br>الاسم : [illegible]<br>التوقيع:<br>تاريخ التقديم: ٢٠١٨/٨/١٨ | اعتماد الاستشاري:<br>الاسم: [illegible]<br>التوقيع:<br>التاريخ: |

- هذا النموذج يقدم من نسختين أصليتين نسخة للاستشاري وأخرى للمقاول.
- صورة النموذج (للأمانة)

**Materials Sector**
**Purchasing Department**
**Vendors Affairs Division**

الشركة السعودية للكهرباء
Saudi Electricity Company
Empowering Energy

Date: 06/12/2018
Vendor Name: Masag factory for plastic industrier
P.O. Box : 51442
C. R. NO: 4030206443
E-mail : Hussamaammari@gmail.com

**SUBJECT: VENDOR'S REGISTRATION NOTIFICATION**

Dear Sir,
We are pleased to inform that your commercial documents have been evaluated and your company is now registered with Saudi Electricity Company under Vendor No ( 2006975 )

You must fill up the prequalification form/ requirements whenever it is applicable, which available on SEC website ( Click Here ) in order to deliver materials based on your activity in your Commercial Registration.

To Login E-Bidding System: (Click Here)
Vendor ID: 2006975
Password: eEy1kw

When you log on the system as a first time please change your password immediately through e-bidding link which available on SEC webpage.

Notice :
1. This approval should not be construed as commitment by SEC to purchase from you but when needed SEC will invite you to bid and will be evaluated based on the established policies & procedures.
2. If the Bid is considered as a LOW VALUE you must quote through the e-bidding system . However, if the bid is a HIGH VALUE you must submit the quotation in a closed envelope and submit to reception of purchasing sections in operating area's requested the materials.

We would suggest that you maintain a continuous contact with Purchasing Sections in SEC operating areas.
We thank you for your interest to deal with Saudi Electricity Company.

Best Regard,

Localization and Technical Qualification Department
Headquarters Grnatah Tower (A6) - Gth floor
Riyadh - Saudi Arabia
prc-vendor@se.com.sa

KING FAISAL SPECIALIST HOSPITAL AND RESEARCH CENTRE

05 OCT 2017

DIYAR
Saudi Diyar Consultants

RABYA

# KING FAISAL SPECIALIST HOSPITAL-JEDDAH, KSA

## MATERIAL SUBMITTAL SHEET

| Project Ref. | Contractor | No. | Rev |
|---|---|---|---|
| 1257S | RABYA GENERAL CONTRACTORS | KFSH-EX-ME-MS-0160 | R03 |

To: **DIRECTOR OF ENGINEERING, KING FAISAL SPECIALIST HOSPITAL & RESEARCH CENTRE**
Document Control (2 Copies)

**Material Description/Location**

PVC CLASS 3 ,CLASS 4 , CLASS 5 / EXTERNAL

Submittal Issue Date: 04-10-2017

Response Requested By: 18-10-2017

Page 1 of 2

05 OCT 2017
4102 150 90

We confirm that the material hereby submitted is suitable for the conditions of use and conform with the contract specifications and all applicable codes, standards and statutory requirements. We confirm that no variation in the contract sum is implied or claimed by this submittal sheet. Acceptance of this material submittal does not alter in any way whatsoever our contractual or common obligations and responsibilities. Where the submittal is in any way in variance with the specification, such variations must be identified and brought to the attention of the Engineer or Engineer's representative on this form. The Engineer's acceptance will be invalidated if such variations are not identified.

SIGNATURE

**Enclosure**

- ■ MT: Material
- ■ DS: Data Sheet
- ☐ CL: Calculation
- ☐ CT: Certificates
- ☐ AB: As Built
- ☐ TT: Tests
- ☐ SC: Schedule
- ■ SM: Samples
- ☐ GT: Guarantees
- ☐ CL: Catalogue
- ☐ PQ: Prequalification
- ☐ OT: Others

Contract Specification Clause Ref; **334110**

| SPECIFIED | | PROPOSED | |
|---|---|---|---|
| MFR AGENT | -- | MFR AGENT | **TAMDEED** |
| MAKE/ MODEL | PVC CLASS 3 ,CLASS 4 , CLASS 5 | MAKE/ MODEL | PVC CLASS 3 ,CLASS 4 , CLASS 5 |
| CAPACITY/ SIZE | | CAPACITY/ SIZE | - |
| | | REASON FOR ALTERNATIVES | |

Attached :

1) 1Cd +2 hard copies of material submittals .+3 SAMPLE BOARD

Refer to enclosed comments.
Comply with comments.

DATE RECEIVED

SIGNATURE

DIYAR
10 OCT 2017
RECEIVED

DISTRIBUTION:

**RETURNED TO CONTRACTOR: DOCUMENT STATUS**

| | | | |
|---|---|---|---|
| A: Approved | | C: Revise and Resubmit .Work Cannot Proceed | |
| B: Approved As Noted. Work can Proceed. | ✓ | D: Rejected / Not Approved Work Cannot Proceed | |
| I: Retained for Information | | | |

**IMPORTANT:** Permission to proceed does not constitute acceptance of design details calculations analyses test methods or materials developed or selected by the contractor / supplier and does not relieve contractor / supplier from full compliance with contractual obligations.

**Main Contractor**

**Signature** _____ **Date** 09/10/2017

(Mazeer Ahmed)

10/10/2017



Rev. 1

Urban Regeneration Co. | SAK | INTERNATIONAL COMPANY

# MATERIAL SUBMITTAL FORM

| | | | |
|---|---|---|---|
| **Contractor :** | **GHONAIM INTERNATIONAL CO.** | **Date :** | **07 / Nov /2017** |
| **Project Name:** | **Salman Bay Housing Project** | **Ref. No. :** | **MAT-05-MEC** |
| **Location :** | **Dhaban District, Jeddah** | | |

**Please check appropriate box:**

- ☐ Certificate
- ☐ Drawing
- ☐ Engineering Calculation
- ■ Material Sample
- ☐ Manual
- ■ Pre-qualification
- ☐ Procedure/ Methodology
- ■ Product Data
- ☐ Report
- ☐ Test Reports
- ■ Catalogues
- ☐ Compliance Sheet

**Purpose:**

☐ For Your Information ■ For Your Review & Approval ☐ As Requested

**Subject:** **TAMDEED PIPES**

**Material Description:**

- **Tamdeed UPVC, CPVC Pipes and Fittings (Company profile and data sheet).**

**SAK Review & Approval Status**

- ☐ Approved As Submitted (work may proceed)
- ☑ Approved As Noted (work may proceed as noted)
- ☐ Re-submittal Required
- ☐ Submittal Incomplete
- ☐ Submittal Inconsistent with Contract
- ☐ Unacceptable
- ☐ Disapproved
- ☐ Other Comments

**Comments:**

Follow strictly data sheet recommendations & method of installation.

| Contractor Project Manager | Received by SAK: | SAK Project Manager |
|---|---|---|
| Sign: Date: 7/11/2017 | Sign: Date: | Sign: Date: 07/11/2017 |

شركة الأوتاد الوطنية للإنشاءات المحدودة

Project No.: 1
Project Name: AL-MASSARA COMPOUND
Location: AL-NAEEM dist.

# MATERIAL SUBMITTAL

[ ] New Submittal  Submittal No. AWT-MC-19  Previous Submittal No.

[x] Resubmitted  Submittal Date :25-11-2017  Previous Submittal Date:

**PURPOSE OF SUBMITTAL** [ ] For Information [ ] For Comments [X] For Approval

**DISCIPLINE**

[ ] CIVIL [ ] ARCHITECTURE [ ] STRUCTURAL [x] HVAC [ ] PLUMBING [X] ELECTRICAL [ ]

**ATTACHMENT**

[X] CATALOGUE [ ] DRAWING [ ] CERTIFICATE [x] SAMPLE [ ] TECILDATA [ ] CALCULATIONS

**MATERIAL / EQUIPMENT** Note: Please use the attachment in case items are more than the provided space.

| Sr. No. | Name, No. and Description | Origin | Manufacturer / supplier | Specification Reference | Standard | Approval Status |
|---|---|---|---|---|---|---|
| 1 | **PVC Pipes Sch 40 for drainage, Waste and vent and sch. 80 for Water (Cold and Hot) piping.** | KSA | Tanideed Saudi Organic, Masag for plastic industry | | | |
| | Refer to physical sample. | | | | | |

**Contractor's Remarks** We clarify that above submittal is strictly adhered with contract drawings, specifications except otherwise stated below:

**Exceptions**

CONTRACTOR PROJECT MANAGER
Name : Eng. Waleed Gamal
Signature → Date:

**Consultant's Recommendations** Approval of the above materials does not relieve the contractor from his contractual obligation

TANDEED PIPES APPROVED TO USE FOR PLUMBING SYSTEM. 29/11/2017

**Client's Recommendations** Approval of the above materials does not relieve the contractor from his contractual obligation 27/11/2017

**Approval Status:**

[A] Approved [B] Approved As Noted [C] Resubmitted [D] Rejected

27/11/2017

29-11-2017

# KAU - New Item Approval Supplier's Detail Report

| Sno. | Description Materials | Supplier / Manufacterer Name | Brand Name | Spec. No. | Phone No. | Email |
|---|---|---|---|---|---|---|
| **ARCHITECTURAL** | | | | | | |
| ١ | UNITED CEMENT BOARD | UMI Pvt Ltd | UNICEM | | ٩٦٦ ١٢ ٦٧٧٤١٦٤ | a.khan@ugc.com.sa |
| ٢ | EXPANSION- AND MOVEMENT JOINT | ISSA BINLADEN BRANCH EST. | DURAL Made in Germany | | ٠١٢٦٢١٥٢٠٣ | ib\bldmt@sps.net.sa |
| ٣ | Gypsum Board Wall , ceiling | United Mining Industries | UMI | | ٠١٢٦٧٧٣٨٢٧ | k.hamed@ugc.com.sa |
| ٤ | United Gypsum Board & Ceiling | UMI Pvt Ltd | United Boards & UNICEL | | +٩٦٦ ١٢ ٦٧٧٤١٦٤ | k.hamed@ugc.com.sa |
| ٥ | Linido Solutions – Bathroom Safety | Alssafwa Dimensions | Linido Solutions – Handicare | | ٠١٢٦٧٤٣٧١١ | mpr.alsafwa@gmail.com |
| **ELECTRICAL** | | | | | | |
| ٦ | Ring Main Unit | Alfanar | SFA alfanar | | ٩٢٠٠٠٦١١١ | sultan.fathaldin@alfanar.com |
| ٧ | Building Management System | Teamac Arabia Contracting Establishment | Delta Controls | | +٩٦٦١٢٦٦١٢٢٥٥ | aamer.abdullatif@teamac-arabia.com |
| ٨ | Dry Transformer | Alfanar | IMEFY | | ٩٢٠٠٠٦١١١ | sultan.fathaldin@alfanar.com |
| ٩ | Data Cabling | Baud Telecom Company | Leviton | | ٠١٢-٦٩١٨٧٨٧ Ext. ٢٣٢ | teampro@ikkgroup.com |
| ١٠ | IPTV | Saudi Projects and Supplies Company | TELEVES | | +٩٦٦١٢٦٥٢٩٢٧٤ | mrk.sps@aps.com.sa |
| **MECHANICAL** | | | | | | |
| ١١ | pumps, controls and accessories for the following: chilled water, circulators, fire pumps, water transfer, water treatment, water boosting, high pressure app, waste water, vertical or horizontal, single or multistage. also mixers for waste sewage treatmen | WILO SAUDI ARABIA COMPANY LIMITED | Wilo, Salemson, ruhrpumpen, | | ٠١٢٠٢٩١٣٢٤٧ | abdallah.kaddoura@wilo.ae |
| ١٢ | GRP PIPES& HDPE PIPES & HDPE SHEETS | Abuljadayel factory for GRP& PE Pipes | AJ PIPE ( LOCAL ) | | ٠١٢٠٦٠٨٢٢٩٢ | ajpipe.m@abuljadayel.com |
| ١٣ | VARIABLE AIR VOLUME- AIR TERMINALS | Al Salem Air conditioning - Johnson Controls | TITUS | | ٠١١ ٤٧٧٤٩٠٨ | ahmad.aljarrah@jci.com |
| ١٤ | PIPE SUPPORTS & HANGERS, VIBRATION ISOLATOR, FLEXIBLE CONNECTORS THERMOMETERS & GAUGES, PIPE & DUCT INSULATION, RUBBER INSULATION, ALUMINUM CLADDING, IDENTIFICATION LABELS & TAGS, FLEXIBLE DUCT, FLEXIBLE DUCTCONNECTOR, | AFAQ AL MALAZ TRADING CO. LTD. | WEICCO, WINTERS, KIMMCO, ARIFLEX, GEE, DELMON, FLEXITUB, MUHEET AL ARAB, RH PROFILE, ABRO, CRAYFLEX | | ٠١١٠٤٧٧٦٥٦٦ | sales@afaqmalaz.com |
| ١٥ | HDPE Fittings, Welded and Mechanical Joints | Mashail Future Trading and Contracting | Georg Fischer | | ٠١١٠٢٩١٢٣٨٧ | zahersh@mashail-future.com |
| ١٦ | PVC UPVC Pipes | Masag Factory for Plastic Industrial | Tamdeed | | ٠١٢ ٦١١٠٦٥٧ | Fmasag@gmail.com |
| ١٧ | CPVC, PVC PIPE | Al Tamam Modern Factory | AL TAMAM | | ٠٠٩٦٦١٢٢٦٨٠٨٠٩ | ALTAMAMFACTORY@gmail.com |

120

| Document Title: | DOCUMENT SUBMISSION FORM | | |
|---|---|---|---|
| Project Name: | MODON Jeddah 4 Industrial City RBF 900 m2 1 x 12 ( 12 units ) | Project Contractor | Alsoraiya Real estate Investment & contractor CO. |
| Project Number: | JDH4-005-007 | Project Consultant | Dar AL-Riyadh |
| | | Document Reference No.: | JDH4-05-007-DAT-109 |

MODON

دار الرياض DAR AL RIYADH

| DOCUMENT ISSUED BY | | DOCUMENT RECEIVED BY | | CC: |
|---|---|---|---|---|
| Issued By | Mamoon Ahmed Saloptah | Received By | Yousif Al Haj Ahmed | |
| Position / Company | Alsoraiya Real Estate Investment & contractor CO. | Position / Company | Document Controller DAR Al Riyadh – Jeddah3 | |
| Signature | | Signature | | |
| Date | 07/3/2017 | Date | 7.3.2017 | 2.31 |

دار الرياض DAR AL RIYADH
MODON Industrial Cities
DAR CM Western Region
Document Log Nr.
120

## DOCUMENT SUBMISSION TYPE (Tick relevant Box)

| | | | | | |
|---|---|---|---|---|---|
| | As Built | X | Material Sample | | Bill of Quantities |
| | Certificate | | Manual | | Schedule |
| | Drawing | | Pre-qualification | | Shop Drawing |
| | Engineering Calculation | | Procedure/Methodology | | Bank Warranty |
| | Job Order | X | Product Data | | Letter |
| | Report | | Test Report | | Other: |
| | | | | | |

## PURPOSE FOR DOCUMENT SUBMISSION

| FOR INFORMATION | FOR REVIEW & APPROVAL | AS REQUESTED | OTHER ( As Noted) | DATE RESPONSE REQUIRED BY Indicate Date |
|---|---|---|---|---|
| ☐ | X | ☐ | ☐ ---------- | ---------- |

## SUBMITTED DOCUMENTS REFERENCE NUMBERS

| # | Document Reference No. | Document Description | Rev. | Hard Copy | Soft Copy |
|---|---|---|---|---|---|
| | | DATA SHEET FOR MASAG FOX PLASTIC INDUSTRY | 0 | 1 | |
| | | MASAG FOX PIPE SAMPLE BOARD → Not matching | 0 | 1 | |
| | | with our BOQ | | | |
| | | Electrical Upvc pipe. (150 mm / 5 Class) | | | |

To continue List - use "Submittal Continuation Form"(MOD-DOC-10.0-002)

## CONSULTANT REVIEW AND APPROVAL STATUS

| APPROVED AS SUBMITTED (Code A) | APPROVED AS NOTED (Code B) | REJECTED/RE-SUBMIT (Code C) | DISAPPROVERD (Code D) |
|---|---|---|---|
| ☐ | X | ☐ | ☐ |

COMMENTS:
* Submittal was checked and found OK with Notes:-
* the Company is New and No prequalification and Other Company approvals.

Reviewed by : MAHMOUD Hashem 13/3/2017

See Comments - use "Submittal Continuation Form"(MOD-DOC-10.0-002)

| RESPONSE ISSUED BY | | | | MODON APPROVAL (IF REQ.) | |
|---|---|---|---|---|---|
| Issued By | Abdelrazek Ali | Received By | Taher Salah El Din S. El Fiky | Received By | Ahmid AL-Otaibi |
| Position / Company | DAR Site Engineer | Position / Company | DAR CONSTRUCTION MANAGER | Position / Company | PROJECT MANAGER |
| Signature | | Signature | | Signature | |
| Date | | Date | 13/3/2017 | Date | |

| CM Team | Action 1 (Initials) | Date Time | Action 2 (Initials) | Date Time | Action 3 (Initials) | Date Time | Action 4 (Initials) | Date Time | CM Target Response - Work Days |
|---|---|---|---|---|---|---|---|---|---|
| | VA | 7-3-17 2.35 | MH | | | | | | |

ANSWERED 13 MAR 2017

أمانة جدة

المملكة العربية السعودية
وزارة الشؤون البلدية والقروية
أمانة محافظة جدة
الإدارة العامة للحدائق والتشجير
إدارة الدراسات والمشاريع

الرقم .....
التاريخ .....
المرفقات .....
الموضوع .....

نموذج طلب اعتماد مواد

اسم الشركة الموردة: شركه مصاغ للصناعات البلاستيكيه( تمديد)
رقم الشركة الموردة: 4030206443
اسم المدرب: محمد صابر حمد
تاريخ تقديم العينات:

نوع الاعتماد

شبكات ري ☐ أعمال مدنية ☐ أعمال كهرباء ☐ أعمال ميكانيكية ☐

| م | وصف البند | بلد المنشأ | ملاحظات |
|---|---|---|---|
| 1. | Upvc Pipes according to SASO std 14/15-1998 equivalent to DIN std 8062 ranging from 20 mm to 630 mm Dia in different classes (2.3.4&5) | KSA | |
| 2. | Upvc Pipes according to ASTM D 1785 ranging from 1/2 " to 8 " ( sch-40) | KSA | |
| 3. | Upvc Pipes according to ASTM D 1785 ranging from 1/2 " to 4 " ( sch-80) | KSA | |
| | | | |
| | | | |
| | | | |

نتيجة الاعتماد

موافق ☐ موافق بملاحظات ☐ يعاد التقديم ☐ غير موافق ☐

مصنع مصاغ للصناعات البلاستيكية
س.ت ٤٠٣٠٢٠٦٤٤٣
C.R. 4030206443
Massag Factory For Plastic Industries

ختم الشركة

الشركة الموردة
الإدارة: شركه مصاغ للصناعات البلاستيكيه (تمديد)

مدير عام الحدائق والمرافق
م. محمد بن زين الله المطيري

مدير الحدائق والمساحات الخضراء

الإدارة العامة للحدائق والتشجير
أمانة جدة

الإدارة العامة للمشروع
نسخة للمقاول
نسخة للاستشاري
نسخة إدارة المشاريع للتأكد من مطابقتها اثناء التنفيذ

ST 259

Construction, testing, commissioning & completion of bridge road E for Jabal Omar Development Project, Makkah

SHADE — شركة شيد المحدودة SHADE CORPORATION LTD

# DOCUMENT TRANSMITTAL FORM (DTF)

| | |
|---|---|
| **Contract No:883-0-MCT-CT78-2017-C065** | **Work Package:CT78** |

| | |
|---|---|
| **TO: Khatib & Alami** | **TRANS. NO:** 883-1-S7-BRE-C-CT78-SHD-KAA-TRN-OS-0259 |
| **FROM: SHADE EPC Contractors** | **DATE: October,02,2018** |
| **ATTN: Mr. Walid Khatib** | **C/REF:** 883-1-S7-BRE-C-CT78-SHD-KAA-SBT-OS-0259 |

| WE ARE SENDING: | | SUBMITTED FOR: | | ACTION TAKEN: | |
|---|---|---|---|---|---|
| ☒ | Documents | ☒ | Approval | ☐ | A -Approved |
| ☐ | Drawings/Sketch | ☒ | Review & Comments | ☐ | B -Approved as noted, Incorporate Comments |
| ☐ | Report | ☐ | As Requested | ☐ | C- Revise & Re-submit (Not Approved) |
| ☐ | Change Order | ☐ | Information / Records Only | | |
| ☐ | Letter | ☐ | For Necessary Action | ☐ | D- Rejected |
| ☐ | Invoice | ☐ | Other: | | |
| ☐ | BOQ/Specification | SENT VIA: | | | |
| ☒ | Other: Material Submittal | ☐ | Attached | | |
| | | ☐ | Separate Cover | | |

| Item No. | Submittal or Document No. | Rev. No. | Date | Description of Submittal or Document Title | Copies |
|---|---|---|---|---|---|
| 1 | 883-1-S7-BRE-C-CT78-SHD-KAA-SBT-OS-0259 | | 02-10-2018 | Submittal of Material For:- Class 4 UPVC pipes From 25 mm to 110 mm Diameters (Masag Factory For Plastic Industries) "TAMDEED" | 2 |
| | | | | | |
| | | | | | |

**Response:** ***Approval Status*:**

| Item No. | Submittal or Document Ref. No. | Rev | Date | Description of Submittal or Document Title | Status |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |

RECEIVED 02 OCT 2018

Sender Name: Osama Maamoun Gad

Designation: Project Manager

Signed by Sender

Received By Recipient ..... Date ..... Title .....

Copy Distribution ☐ ☐ ☐ ☐

***Legends:** A- Approved B- Approved As Noted, Incorporate Comments C- Revise & Resubmit (Not Approved) D- Rejected



Document No: JODC-QMS-PMO-02-FM-01 Rev.0
Revision Date: 16-Aug-16

Construction, testing, commissioning & completion of bridge road E for Jabal Omar Development Project, Makkah

SHADE CORPORATION LTD

# MATERIAL SUBMITTAL FORM

| | |
|---|---|
| **Contract No:883-0-MCT-CT78-2017-C065** | **Work Package:CT78** |

| | | | |
|---|---|---|---|
| **TITLE:** | **Material submittal For :- "Tamdeed" Class 4 UPVC Pipes from 25 mm to 110 mm** | **SUBMITTAL NO:** | 83-1-S7-BRE-C-CT78-SHD-KAA-SBT-OS-00259 |
| **TO:** | *Khatib & Alami* | **DATE:** | **October,02,2018** |
| **FROM:** | *SHADE EPC Contractors* | **REVISION NO:** | |
| **ATTN:** | *Mr. Walid Khatib* | **C/REF:** | |

## MATERIAL SUBMISSION DESCRIPTION

Discipline: **Electrical**

| | |
|---|---|
| Description of Material | **Class 4 UPVC pipes From 25 mm to 110 mm Diameters** (25,32,40,50,63,75,90,110 Dia in millimeters) |
| Specification / Control Document Reference | |
| Manufacturer (Name & Address) | Masag Factory For Plastic Industries **Tamdeed Saudi Organic Plast.** |
| Supplier / Local Agent | Jeddah 2nd Industrial Area PO Box 15442, Jeddah 215442 |
| Description of Attachments | Product Data Sheet |
| Description of Samples | N/A |
| Specification Comparison Sheet | N/A |
| Comparison in case of Alternative Submittal | N/A |

**Submitted By Contractor's Rep.:** **M.Asif QA/QC Eng. 0508356982** **Signature:** 2-10-2018

## PROJECT MANAGEMENT CONSULTANT'S REVIEW

Name: Signature: Date:

## CLIENT'S (JODC) COMMENTS (optional)

Name: Signature: Date:

## SUPERVISION CONSULTANT'S COMMENTS

☐ **A**-Approved ☑ **B**- Approved As Noted, Work with Material May Proceed Subject to Incorporation of Comments & Resubmittal within ... days ☐ **C**-Approved with Comments Work with Material May NOT Proceed, Revise & Resubmit. ☐ **D**- Rejected

DATE RECEIVED: DATE RETURNED:

## SUPERVISION CONSULTANT RESIDENT ENGINEER'S SIGNATURE

For & On behalf of

Name: Mahmoud Abu Zaid Signature: Date: 2/10/2018

RECD 02 OCT

# SUBMITTAL REVIEW COMMENTS FORM

**REVIEW BY:** ☐ DESIGN CONSULTANT ☒ SUPERVISION CONSULTANT ☐ JODC/Engineer ☐ OTHER (Specify)

TYPE OF SUBMITTAL: Material Submittal

SUBMITTAL NO.: 883-1-S7-BRE-C-CT78-SHD-KAA-SBT-OS-0255

TRANSMITTAL NO.: 883-1-S7-BRE-C-CT78-SHD-KAA-TRN-OS-0255

SUBJECT: Material Submittal for Class 4 UPVC pipes from 25 mm to 110 mm Diameters (Masag Factory for Plastic Industries) TAMDEED–Bridge Road E - SHADE

SUB. REVIEW REF. 883-1-Z01-CS03-KAA-SHD-SRC-E0-0162

REVIEW / APPR. STATUS: B

| Item No. | Title / Reference No. of Document Reviewed | Review Comments | Review Basis (Specify Contract / Specification Clauses) |
|---|---|---|---|
| | 1. Material Submittal for Class 4 UPVC pipes from 25 mm to 110 mm Diameters (Masag Factory for Plastic Industries) TAMDEED – Bridge Road E - SHADE<br>Dated 02.10.2018 | **Submitted Items:**<br>1. Class 4 UPVC pipes from 25 mm to 110 mm Diameter (Masag Factory for Plastic Industries) TAMDEED- Bridge Road E - SHADE.<br>**K&A Comments:**<br>1. Masag Factory for Plastic Industries PVC, UPVC Conduits are approved , The approval is conditional the following:<br>a) The Pipes and fittings shall be Class 4.<br>b) These pipes shall be used for the embedded works only.<br>2. Code B. Approved as noted. | |

Reviewer Company Name: **KHATIB & ALAMI**

Main Reviewer's Name: WALID KHATIB Designation: ACRE MEP/Acting CRE Signature Date 02.10.2018

Reviewer's Name: Mahmoud Abuzaid Designation: Electrical RE Signature Date 02.10.2018

***Review Status Legends:** **A**-Approved **B**-Approved As Noted, Incorporate Comments **C**- Revise & Resubmit (Not Approved) **D**-Rejected

# 06 ✧ Test Certificates.

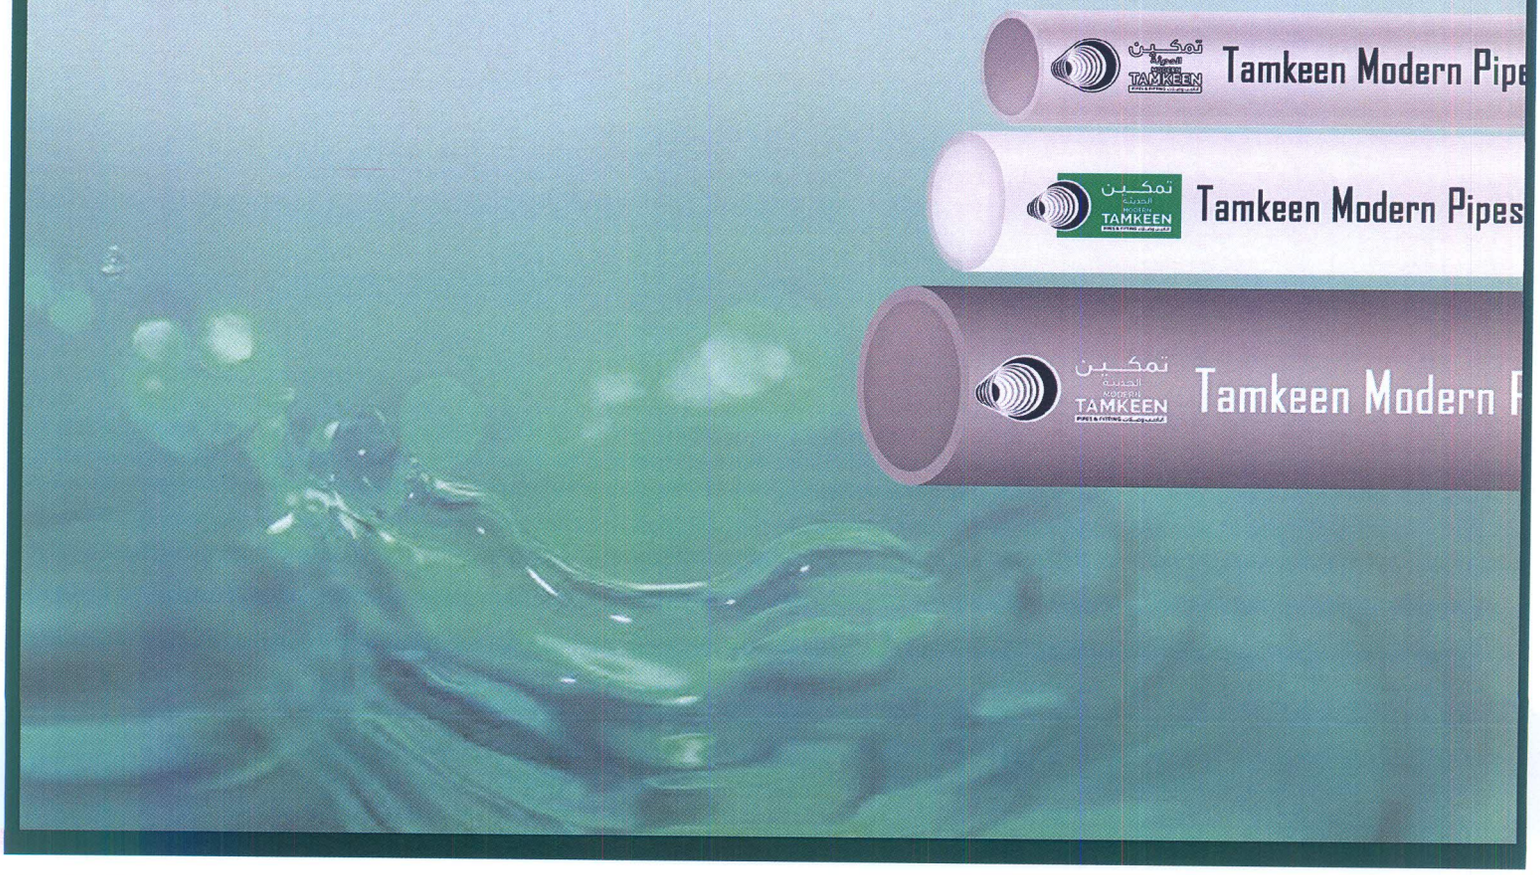

| AL HOTY-STANGER | CLIENT: TAMKEEN MODERN PIPES CO. | TWO No. : KHSPL21211 |
|---|---|---|
| | | Report No. : KHSPL21211-R2-V2 |
| | JEDDAH - KSA | Report Date : 16-12-2021 |
| | | Invoice No. : |
| | TEST REPORT | Ref. No. : |

| | | |
|---|---|---|
| Sample No. | : | KHSPL21211-1 |
| Sample Description | : | **UPVC PIPE 1" SCH 80 PSI 630 (TAMDEED)** |
| Company | : | **TAMKEEN MODERN PIPES CO.** |
| | : | **Previously known as MASAG FACTORY FOR PLASTIC INDUSTRIES (TAMDEED)** |
| Test required | : | **Toxicity Test (BS 6920)** |
| Testing date | : | **02-12-2021 to 07-12-2021** |
| Sample Delivered By | : | **Client** |
| Project | : | **NA** |

A sample of UPVC PIPE was received from M/S TAMKEEN MODERN PIPES CO. It was requested by the client to conduct the test for Effect on water Quality exposed to the UPVC PIPE.

## TEST METHOD:

The test on the submitted UPVC PIPE samples was conducted at exposure at **60°C temperature** by using the test method as outlined in BS 6920-1:2014 for the following clause.

- **CLAUSE 4** : **ODOUR AND FLAVOR IN WATER**
- **CLAUSE 5** : **APPEARANCE OF WATER**
- **CLAUSE 6** : **GROWTH OF AQUATIC MICRO ORGANISM**
- **CLAUSE 8** : **EXTRACTION OF METALS**

**TEST PROCEDURE:**

- The UPVC PIPE sample were filled with drinking water and the above tests were conducted on 24 hours exposed water. Further a control test on unexposed water was also conducted. All the above tests were conducted by using AWWA (2013) test method.

**RESULTS: See the attached sheet**

**Note :**

AHSL certifies that the above test was carried out in accordance with specific standard.

**Tested by**

**HASAN SHAWKAT, B.E**
Polymer Engineer
Specialist Department
For AL HOTY - STANGER LTD. CO.

AL HOTY-STANGER LTD. CO
C.R. 2051002999
SPECIALIZED TESTING SERVICES
Independent Laboratories & Materials Testing

**Verified by**

**SAYYED ASJAD HUSSAIN, MBA**
Department Head
Specialist Department

Test Method Variation: NONE

This report relates only to the sample tested and shall only be reproduced in full with the written approval of Al Hoty-Stanger testing laboratory

F-5



AL HOTY-STANGER LTD. CO.
INDEPENDENT LABORATORIES & MATERIALS TESTING
P.O. BOX 3072 Al-Khobar 31952 - Tel: (013) 889 1000 / 808 4317 / 808 7517 / 808 7518 / 808 5217 Fax: (013) 898-1466
Jubail P.O. 467 - Tel: (013) 341-6791 Fax : (013) 341-0642 - Hofuf P.O. Box 2752 - Tel: (013) 586-3210 Fax: (013) 587-1420 - Riyadh P.O. Box 7359 - Tel: (011) 478-4292 Fax: (011) 479-2058
Jeddah P.O. Box 8129 - Tel: (012) 660-1924 Fax: (012) 665-6742 - Yanbu - P.O. Box 30312 - Tel: (014) 322-5495 Fax: (014) 391-7471 - Jazan : Tel.: (017) 334-0518

| AL HOTY-STANGER | CLIENT: TAMKEEN MODERN PIPES CO. | TWO No. : KHSPL21211 |
|---|---|---|
| | | Report No. : KHSPL21211-R2-V2 |
| | JEDDAH - KSA | Report Date : 16-12-2021 |
| | | Invoice No. : |
| | TEST REPORT | Ref. No. : |

| | | |
|---|---|---|
| Sample No. | : | KHSPL21211-1 |
| Sample Description | : | **UPVC PIPE 1" SCH 80 PSI 630 (TAMDEED)** |
| Company | : | **TAMKEEN MODERN PIPES CO.**<br>**Previously known as MASAG FACTORY FOR PLASTIC INDUSTRIES (TAMDEED)** |
| Test required | : | **Toxicity Test (BS 6920)** |
| Testing date | : | **02-12-2021 to 07-12-2021** |
| Sample Delivered By | : | **Client** |
| Project | : | **NA** |

## CLAUSE 5 : APPEARANCE OF WATER

| TEST DESCRIPTION | UPVC PIPE 1" SCH 80 PSI 630 | CONTROL SAMPLE |
|---|---|---|
| | 24 HOURS EXPOSED WATER | UNEXPOSED CONTROL WATER |
| **APPEARANCE** | Clear | Clear |
| **Color (Pt. Co Scale), unit** | LT 5 | LT 5 |
| **Turbidity (NTU)** | LT 1 | LT 1 |

**LT = Less than the detection limit**

**REMARKS:** Meet the requirement.

**Note :**

AHSL certifies that the above test was carried out in accordance with specific standard.

**Tested by**

**HASAN SHAWKAT, B.E**
Polymer Engineer
Specialist Department
For AL HOTY - STANGER LTD. CO.

**Verified by**

**SAYYED ASJAD HUSSAIN, MBA**
Department Head
Specialist Department

Test Method Variation: NONE

This report relates only to the sample tested and shall only be reproduced in full with the written approval of Al Hoty-Stanger testing laboratory

F-5



AL HOTY-STANGER LTD. CO.
INDEPENDENT LABORATORIES & MATERIALS TESTING
P.O. BOX 3072 Al-Khobar 31952 - Tel: (013) 889 1000 / 808 4317 / 808 7517 / 808 7518 / 808 5217 Fax: (013) 898-1466
Jubail P.O. 467 - Tel: (013) 341-6791 Fax : (013) 341-0642 - Hofuf P.O. Box 2752 - Tel: (013) 586-3210 Fax: (013) 587-1420 - Riyadh P.O. Box 7359 - Tel: (011) 478-4292 Fax: (011) 479-2058
Jeddah P.O. Box 8129 - Tel: (012) 660-1924 Fax: (012) 665-6742 - Yanbu - P.O. Box 30312 - Tel: (014) 322-5495 Fax: (014) 391-7471 - Jazan : Tel.: (017) 334-0518

| AL HOTY-STANGER | CLIENT: TAMKEEN MODERN PIPES CO. | TWO No. : KHSPL21211 |
|---|---|---|
| | | Report No. : KHSPL21211-R2-V2 |
| | JEDDAH - KSA | Report Date : 16-12-2021 |
| | | Invoice No. : |
| | TEST REPORT | Ref. No. : |

| | | |
|---|---|---|
| Sample No. | : | KHSPL21211-1 |
| Sample Description | : | **UPVC PIPE 1" SCH 80 PSI 630 (TAMDEED)** |
| Company | : | **TAMKEEN MODERN PIPES CO.** |
| | : | **Previously known as MASAGFACTORY FOR PLASTIC INDUSTRIES (TAMDEED)** |
| Test required | : | **Toxicity Test (BS 6920)** |
| Testing date | : | **02-12-2021 to 07-12-2021** |
| Sample Delivered By | : | **Client** |
| Project | : | **NA** |

## CLAUSE 8 : THE EXTRACTION OF METALS

| TEST DESCRIPTION | UPVC PIPE 1" SCH 80 PSI 630 24 HOURS EXPOSED WATER (µG/lit) | CONTROL SAMPLE UNEXPOSED CONTROL WATER (µG/lit) | MAXIMUM ALLOWABLE LIMITS (µg/lit) |
|---|---|---|---|
| ALUMINIUM (Al) | LT 100 | LT 100 | 200 |
| ANTIMONY (Sb) | NDLT 5 | NDLT 5 | 5 |
| ARSENIC (As) | NDLT 10 | NDLT 10 | 10 |
| BORON (B) | LT 100 | LT 100 | 1000 |
| CADMIUM (Cd) | NDLT 5 | NDLT 5 | 5 |
| CHROMIUM (Cr) | NDLT 50 | NDLT 50 | 50 |
| IRON (Fe) | LT 100 | LT 100 | 200 |
| LEAD (Pb) | NDLT 10 | NDLT 10 | 10 |
| MANGANESE (Mn) | NDLT 50 | NDLT 50 | 50 |
| MERCURY (Hg) | NDLT 1 | NDLT 1 | 1 |
| NICKEL (Ni) | NDLT 10 | NDLT 10 | 20 |
| SELENIUM (Se) | NDLT 10 | NDLT 10 | 10 |

LT = Less than the detection limit, NDLT = Not detected less than the detection limit

**REMARKS: The above test results of the 24 Hours extract meet the limits in table 1 of the standard BS6920: Part 1-2.6 clause 6.**

**Note :**

AHSL certifies that the above test was carried out in accordance with specific standard.

**Tested by**

**HASAN SHAWKAT, B.E**
Polymer Engineer
Specialist Department
For AL HOTY - STANGER LTD. CO.

AL HOTY-STANGER LTD. CO. C.R. 2051002999 SPECIALIZED TESTING SERVICES Independent Laboratories & Materials Testing

**Verified by**

**SAYYED ASJAD HUSSAIN, MBA**
Department Head
Specialist Department

Test Method Variation: NONE

This report relates only to the sample tested and shall only be reproduced in full with the written approval of Al Hoty-Stanger testing laboratory

F-5



AL HOTY-STANGER LTD. CO.
INDEPENDENT LABORATORIES & MATERIALS TESTING
P.O. BOX 3072 Al-Khobar 31952 - Tel: (013) 889 1000 / 808 4317 / 808 7517 / 808 7518 / 808 5217 Fax: (013) 898-1466
Jubail P.O. 467 - Tel: (013) 341-6791 Fax : (013) 341-0642 - Hofuf P.O. Box 2752 - Tel: (013) 586-3210 Fax: (013) 587-1420 - Riyadh P.O. Box 7359 - Tel: (011) 478-4292 Fax: (011) 479-2058
Jeddah P.O. Box 8129 - Tel: (012) 660-1924 Fax: (012) 665-6742 - Yanbu - P.O. Box 30312 - Tel: (014) 322-5495 Fax: (014) 391-7471 - Jazan : Tel.: (017) 334-0518

| | | |
|---|---|---|
| Sample No. | : | KHSPL21211-1 |
| Sample Description | : | **UPVC PIPE 1" SCH 80 PSI 630 (TAMDEED)** |
| Company | | **TAMKEEN MODERN PIPES CO.** |
| | : | **Previously known as MASAG FACTORY FOR PLASTIC INDUSTRIES (TAMDEED)** |
| Test required | : | **Toxicity Test (BS 6920)** |
| Testing date | : | **02-12-2021 to 07-12-2021** |
| Sample Delivered By | : | **Client** |
| Project | : | **NA** |

## CLAUSE 6 : GROWTH OF AQUATIC MICRO ORGANISM

| TEST DESCRIPTION | UPVC PIPE 1" SCH 80 PSI 630<br>24 HOURS EXPOSED WATER | CONTROL SAMPLE<br>UNEXPOSED CONTROL WATER |
|---|---|---|
| DISSOLVED OXYGEN (DO) (mg/lit) | 7.7 | 8.0 |
| TOTAL BACTERIAL COUNT (CFU/ml) | LT 10 | LT 10 |
| ESCHERISCHIA COLI (POSITIVE/NEGATIVE) | ABSENT | ABSENT |
| COLIFORM (MPNindex/100ml) | LT 1.8 | LT 1.8 |

**LT = Less than the detection limit**

**REMARKS:**
The dissolved oxygen difference (MDOD) is within the acceptable limits of the standard BS 6920: Part 1-2.4 Clause 6.
The microbiological test indicates the exposed and unexposed water sample are free from any pathogenic bacteria and concluded that above test meet the requirement.

**Note :**

AHSL certifies that the above test was carried out in accordance with specific standard.

**Tested by**

**HASAN SHAWKAT, B.E**
Polymer Engineer
Specialist Department
For AL HOTY - STANGER LTD. CO.

AL HOTY-STANGER LTD. CO
C.R. 2051002099
SPECIALIZED TESTING SERVICES
Independent Laboratories & Materials Testing

**Verified by**

pp.

**SAYYED ASJAD HUSSAIN, MBA**
Department Head
Specialist Department

Test Method Variation: NONE

This report relates only to the sample tested and shall only be reproduced in full with the written approval of Al Hoty-Stanger testing laboratory

F-5



AL HOTY-STANGER LTD. CO.
INDEPENDENT LABORATORIES & MATERIALS TESTING
P.O. BOX 3072 Al-Khobar 31952 - Tel: (013) 889 1000 / 808 4317 / 808 7517 / 808 7518 / 808 5217 Fax: (013) 898-1466
Jubail P.O. 467 - Tel: (013) 341-6791 Fax : (013) 341-0642 - Hofuf P.O. Box 2752 - Tel: (013) 586-3210 Fax: (013) 587-1420 - Riyadh P.O. Box 7359 - Tel: (011) 478-4292 Fax: (011) 479-2058
Jeddah P.O. Box 8129 - Tel: (012) 660-1924 Fax: (012) 665-6742 - Yanbu - P.O. Box 30312 - Tel: (014) 322-5495 Fax: (014) 391-7471 - Jazan : Tel.: (017) 334-0518

| | |
|---|---|
| Sample No. | KHSPL21211-1 |
| Sample Description | **UPVC PIPE 1" SCH 80 PSI 630 (TAMDEED)** |
| Company | **TAMKEEN MODERN PIPES CO.** |
| | **Previously known as MASAG FACTORY FOR PLASTIC INDUSTRIES (TAMDEED)** |
| Test required | **Toxicity Test (BS 6920)** |
| Testing date | **02-12-2021 to 07-12-2021** |
| Sample Delivered By | **Client** |
| Project | **NA** |

## CLAUSE 4 : ODOUR AND FLAVOR IN WATER

| TEST DESCRIPTION | UPVC PIPE 1" SCH 80 PSI 630<br>24 HOURS EXPOSED WATER | CONTROL SAMPLE<br>UNEXPOSED CONTROL WATER |
|---|---|---|
| ODOR (SENSORY) | Unobjectionable odor was found. | Unobjectionable |
| | No Chlorine odor found<br>(LT 0.1 mg/lit) | No Chlorine odor found<br>(LT 0.1 mg/lit) |
| FLAVOR (TASTE) | No abnormal taste was found.<br>Sweet taste of water<br>No Chlorine taste found | Sweet and free from any objectionable taste. |

**LT = Less than the detection limit**

**REMARKS:** Meet the requirement.

**Note :**

AHSL certifies that the above test was carried out in accordance with specific standard.

**Tested by**

**HASAN SHAWKAT, B.E**
Polymer Engineer
Specialist Department
For AL HOTY - STANGER LTD. CO.

**Verified by**

pp

**SAYYED ASJAD HUSSAIN, MBA**
Department Head
Specialist Department

Test Method Variation: NONE

This report relates only to the sample tested and shall only be reproduced in full with the written approval of Al Hoty-Stanger testing laboratory

F-5



AL HOTY-STANGER LTD. CO.
INDEPENDENT LABORATORIES & MATERIALS TESTING
P.O. BOX 3072 Al-Khobar 31952 - Tel: (013) 889 1000 / 808 4317 / 808 7517 / 808 7518 / 808 5217 Fax: (013) 898-1466
Jubail P.O. 467 - Tel: (013) 341-6791 Fax : (013) 341-0642 - Hofuf P.O. Box 2752 - Tel: (013) 586-3210 Fax: (013) 587-1420 - Riyadh P.O. Box 7359 - Tel: (011) 478-4292 Fax: (011) 479-2058
Jeddah P.O. Box 8129 - Tel: (012) 660-1924 Fax: (012) 665-6742 - Yanbu - P.O. Box 30312 - Tel: (014) 322-5495 Fax: (014) 391-7471 - Jazan : Tel.: (017) 334-0518

# 07 ✧ Compliance Statement.

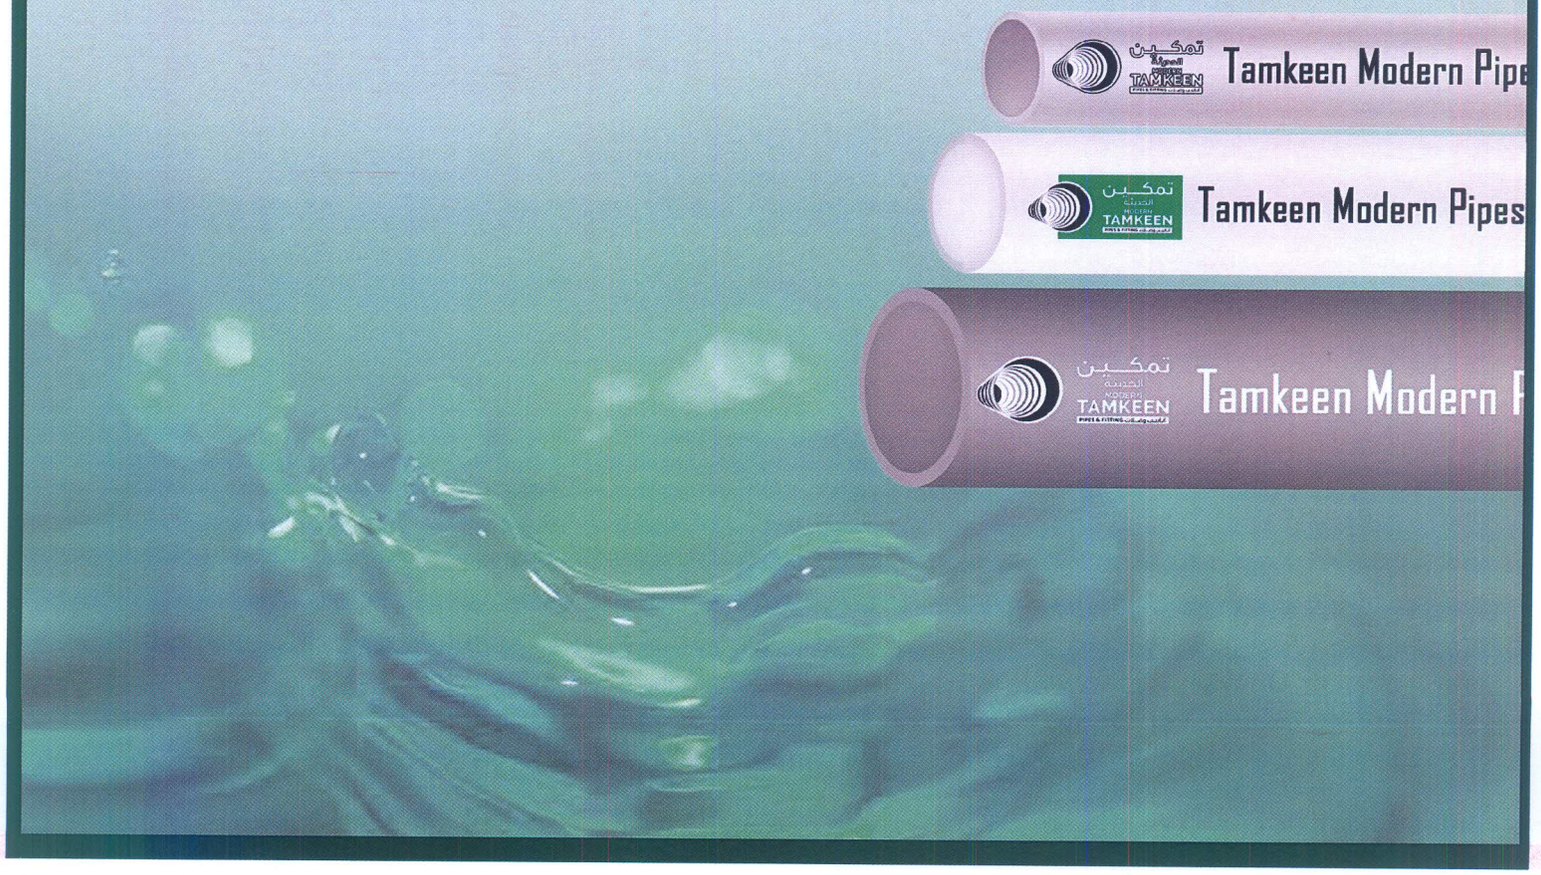

# Tamkeen Modern Pipes Company

## Compliance Certificate

We Tamkeen Modern Pipes Company, Certify that our production of UPVC Pipes are widely used in all types of applications like, Complete plastic piping system, Water Supply, Waste Drainage, Ventilation, Sewer and Irrigation, Electric, Housing, Telecom, Constructions and Industries,
(Civil Construction/Sewerage & Water Treatment Plants / Water Irrigation & Electricity, Telephone)etc.

Tamkeen Upvc pipes for mm sizes manufactured, tested and complies with all the requirements and passed the standard test methods and in accordance with SASO ISO 1452-1-2009, SASO ISO 1452-2-2011, for all PN (6, 8, 10, 12.5, 16 & 20) and Din standard 8061/8062 for all classes.

Tamkeen Upvc pipes for Inches sizes manufactured, tested and complies with all the requirements and passed the standard test methods and in accordance with ASTM D 1785 for all SCH 40 & 80.

ISO Certified Company, Quality Management System (ISO 9001: 2015) Standard.

SASO ISO 1452-1-2009, SASO ISO 1452-2-2011, Certified Company,

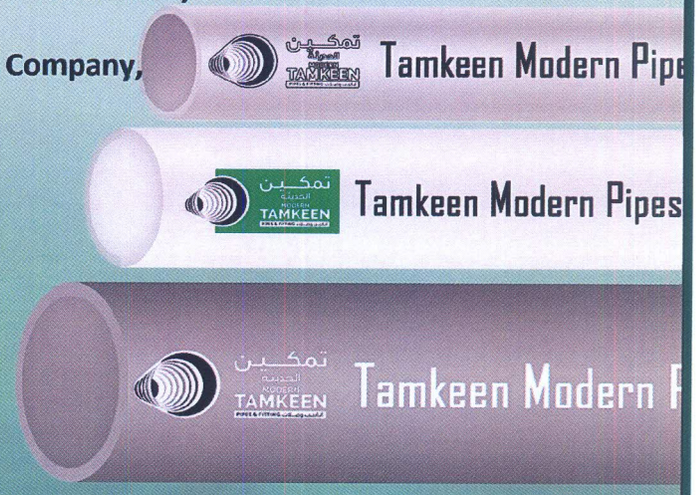


For Tamkeen Modern Pipes Company.

QC/QC-Department.